

.....

Mobile Emergency Hospital



2- axle drawbar trailer with 2 Units
20 ft container frame for transport of
the medical shelters

20 ft Shelter for Operating Theatre (OT) 1 Unit

Consisting of:
Electric wiring, furniture, water supply,
Solar panel with battery back-up and hand lights
Mast with area working light

20 ft Shelter for X-Ray / Ultra Sound (US) 1 Unit

Consisting of:
Electric wiring, furniture, water supply,
Solar panel with battery back-up and hand lights
Mast with area working light
Plumb foil protected

Independent Supply Unit for above shelters 2 Units

Consisting of:
Frame, tool box
Air conditioning unit
Water storage and supply
Generator

Electrical Jacking System 2 Units

for lifting and adjusting container up and
down from truck.
automatic levelling system
remote control


2-axle drawbar trailer with mounted box body with tail lift for storage and transportation of equipment	1 Unit
2-axle drawbar trailer with mounted box body with tail lift for laundry	1 Unit
2- axle drawbar trailer with container mounted box body with tail lift Configuration as follows: - 1 compartment for generator access from left and right side Generator of approx. 60 KVA, noise insulated 3 phases 400 V / 50 Hz with 2 pcs. extension connecting cable for connecting the 2 medical containers - 1 compartment for toilet and washing basin, accessible from side, with ladder - 1 compartment with shower and clothes hangers accessible from side, with ladder - 1 rear compartment for storage 2 water tanks each for 1.000 ltr. fresh water accessible from rear and storage space	1 Unit
Tent Module Consisting of : 9 tents 5 pcs. tents of 30 m ² 4 pcs. tents of 40 m ² Connection corridors for tents Connection corridors tent to shelters	1 Set
Analog X-Ray / US Module	1 Unit
Recovery / ICU Module	1 Unit
Medical Supply Storage Module accessories, cupboard, refrigerator for medicine	1 Unit
Registration / Office Module accessories, furniture, office unit, chair.	1 Unit
Patient Ward, Basic Module	1 Unit

1 Unit

1 Unit

1 Unit

Based in the trailer from
Water storage and power generator

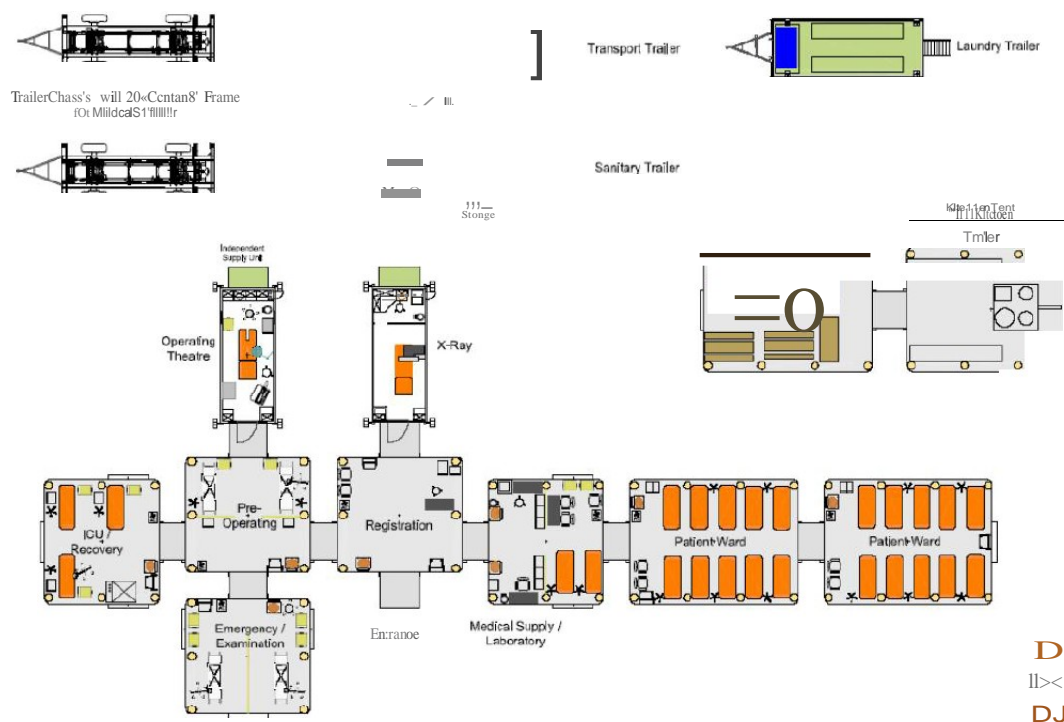

Infrastructure

Technical Module

The technical Module consist of frame with inside installed power unit, climate control unit and water tank.

The technical module was developed for operating of small medical points independent of infrastructure.

The infrastructure contains all support which is needed for the proper work in the field hospital.

2 x 120 ltr. Fresh water

AC exterior unit

Generator approx. 30KVA



Bed

Easy to build up, easy to dismantle by anyone. Can be used as a single bed, double bunk or bench. Multiple bed-heights through special parts or on request.



