




**EVERYTHING
under THE SUN**

<http://AsianDragonIntl.com>

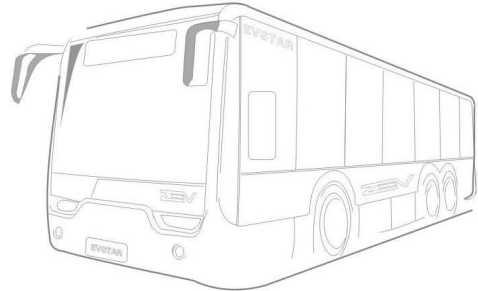

New energy, Light up the road to future



Pure electric mini city bus

Small and flexible Best for sightseeing
Suitable for community and narrow street transport, sightseeing, feeder service (airport, subway, mall and hotel) etc.



Item	Specification
(mm) Dimension	6010 × 2160 × 2535/2750 (含空调) (A/C)
(mm) Wheel Base	4000
(kg) Gross Vehicle Weight	6570
(kg) Curb Weight	4220
Passenger Capacity	36/13-17
(km) Driving Range	250
km/h Max. Speed	69
Motor Mode	PMSM, Water cooling
(kw) Rated Power/Peak Power	30*/65*2
(kwh) Battery/Capacity	64.2 LFP04162.2
Steering System	Integral power steering, electro-hydraulic power steering
Suspension/Braking System	Air suspension, Two-way cartridge damper, disc air brake, spring actuated and air cut-off parking brake
Door System	Front single leaf, rear double leaf, EP controlled aluminum alloy inner swing door
Warm Wind/Defrosting System	Electric defroster
Air Conditioning System	8000 kilocalorie electric overhead A/C

EV Wheel-side Electric city bus

Advanced none axle wheel-side-drive
By taking the unique wheel-side-drive tech, the bus achieves full flat and low floor and the weight reduced to 8750kg.
Carbon fiber composite body for option, obtains lower weight.



项目Item	技术参数Specification
外形尺寸 (mm) Dimension	10250 × 2500 × 3050
轴距 (mm) Wheel Base	4450+1000
最大总质量 (kg) Gross Vehicle Weight	14100
整备质量 (kg) Curb Weight	8750
载客人数 (人) Passenger Capacity	82/10-18
续航里程 (km) Driving Range	250
最高车速km/h Max. Speed	69
电机驱动形式 Motor Mode	永磁同步电机, 水冷 PMSM, Water cooling
额定功率/最大功率 (kw) Rated Power/Peak Power	30*/65*4
电池类型/电池容量 (kwh) Battery/Capacity	磷酸铁锂/162.2 LFP04162.2
转向系统 Steering System	整体式动力转向, 电动液压助力 Integral power steering, electro-hydraulic power steering
悬架系统/制动系统 Suspension/Braking System	空气独立悬架, 前后双向作用筒式减振器/前盘后鼓气制动, 弹簧辅助断气制动 Air suspension, Two-way cartridge damper, disc air brake, spring actuated and air cut-off parking brake
车门及门泵 Door System	前双后双电控气动内摆门, 铝合金 Front double leaf, rear double leaf, EP controlled aluminum alloy inner swing door
暖风/除霜 Warm Wind/Defrosting System	电动除霜器 Electric defroster
空调 Air Conditioning System	19000大卡顶置电动冷暖空调 19000 kilocalorie overhead electric A/C

Wheel-side Electric city bus

Aluminum body Stronger driving force
Rigidity improves 60% while welding spots reduces 40%. Much lighter, better acceleration capability and obtains wonderful anti-corrosion performance.



项目Item	技术参数Specification
外形尺寸 (mm) Dimension	12010 × 2540 × 3060
轴距 (mm) Wheel Base	5300+1000
最大总质量 (kg) Gross Vehicle Weight	16200
整备质量 (kg) Curb Weight	9950
载客人数 (人) Passenger Capacity	95/10-32
续航里程 (km) Driving Range	300
最高车速km/h Max. Speed	69
电机驱动形式 Motor Mode	永磁同步电机, 水冷 PMSM, Water cooling
额定功率/最大功率 (kw) Rated Power/Peak Power	30/65
电池类型/电池容量 (kwh) Battery/Capacity	磷酸铁锂/192.6 LFP04192.6
转向系统 Steering System	整体式动力转向, 电动液压助力 Integral power steering, electro-hydraulic power steering
悬架系统/制动系统 Suspension/Braking System	空气独立悬架, 前后双向作用筒式减振器/前后盘式双回路气压制动, 弹簧辅助断气制动 Air suspension, Two-way cartridge damper, disc and dual circuit hydraulic brake system, spring actuated and air cut-off parking brake
车门及门泵 Door System	前双中双后双电控气动内摆门, 铝合金 Front double leaf, middle double leaf, rear double leaf, EP controlled aluminum alloy inner swing door
暖风/除霜 Warm Wind/Defrosting System	电动除霜器 Electric defroster
空调 Air Conditioning System	32000大卡顶置电动冷暖空调 32000 kilocalorie overhead electric A/C

EV Electric bus

Pioneer of city transportation
A mature configuration is elaborately selected, and the economical and practical performances are seriously considered.
Suitable for the main roads and branch lines of small-middle-large cities.



项目Item	技术参数Specification
外形尺寸 (mm) Dimension	8230 × 2400 × 3220
轴距 (mm) Wheel Base	4100
最大总质量 (kg) Gross Vehicle Weight	12800
整备质量 (kg) Curb Weight	8150,8450
载客人数 (人) Passenger Capacity	66/10-20,58/10-24
续航里程 (km) Driving Range	260
最高车速(km/h) Max. Speed	69
额定功率/最大功率 (kw) Rated Power/Peak Power	65/130
电池类型/电池容量 (kwh) Battery/Capacity	磷酸铁锂/129 LIFePO4/129
转向系统 Steering System	整体式动力转向, 电动液压助力 Integral power steering, electro-hydraulic power steering
悬架系统/制动系统 Suspension/Braking System	空气弹簧独立悬架/空气弹簧非独立悬架/前后盘后鼓双回路气压制动, 弹簧储能气制动 Independent air suspension/Non-independent air suspension/Front disc brake and rear drum brake, Dual circuit hydraulic brake system, spring actuated and air cut-off parking brake
车门及门架 Door System	前单后双, 铝合金门体, 气动内摆乘客门, 配应急阀, 具有自动防夹功能; 铝合金门架, 配舱门锁, 后舱门配拉手 anti-pinch function, Aluminum alloy doors with door lock, back door with handle, Front and rear double leaf door, aluminum alloy pneumatic inner swing passenger door, Equip emergency valve, with automatic anti-pinch function
暖风/除霜 Warm Wind/Defrosting System	电动除霜器 (高压) Electric defroster(high voltage)
空调 Air Conditioning System	顶置式电动冷暖空调 Overhead electric A/C

EV Electric bus

High efficiency Super power
Concise and generous appearance, dynamic and smooth line, showing extraordinary momentum between dynamic and static.
Low energy consumption, modular management are characterized by thoughtfulness and style.



项目Item	技术参数Specification
外形尺寸 (mm) Dimension	10450 × 2500 × 3265
轴距 (mm) Wheel Base	5500
最大总质量 (kg) Gross Vehicle Weight	17800
整备质量 (kg) Curb Weight	11200
载客人数 (人) Passenger Capacity	86/10-26
续航里程 (km) Driving Range	298
最高车速(km/h) Max. Speed	69
额定功率/最大功率 (kw) Rated Power/Peak Power	135/200
电池类型/电池容量 (kwh) Battery/Capacity	磷酸铁锂/177.4/188.1/193.5 LIFePO4/177.4/188.1/193.5
转向系统 Steering System	整体式动力转向, 电动液压助力 Integral power steering, electro-hydraulic power steering
悬架系统/制动系统 Suspension/Braking System	前非独立悬架/2气室/后非独立悬架/4气室/前后盘式双回路气压制动, 弹簧储能气制动 Front Non-independent air suspension with 2 airbags, Rear Non-independent air suspension with 4 airbags, Disc brake and dual circuit hydraulic brake system, spring actuated and air cut-off parking brake
车门及门架 Door System	前单后双, 铝合金门体, 气动内摆乘客门, 配应急阀, 具有自动防夹功能; 铝合金门架, 配舱门锁, 后舱门配拉手 anti-pinch function, Aluminum alloy doors with door lock, back door with handle, Front and rear double leaf door, aluminum alloy pneumatic inner swing passenger door, Equip emergency valve, with automatic anti-pinch function
暖风/除霜 Warm Wind/Defrosting System	电动除霜器 (高压) Electric defroster(high voltage)
空调 Air Conditioning System	19000大卡顶置式电动冷暖空调 19000 kilocalorie overhead electric A/C

Hydrogen Electric city bus

Fast fueling Long driving range
3-5 minutes for fueling, Driving range exceeds 380km. Configured with advanced driving assistance system.
Working quietly with lower noise condition (55dB).



项目Item	技术参数Specification
外形尺寸 (mm) Dimension	12260 × 2540 × 3400
轴距 (mm) Wheel Base	1000+4800+1000
最大总质量 (kg) Gross Vehicle Weight	18700
整备质量 (kg) Curb Weight	11800
载客人数 (人) Passenger Capacity	106/10-26
续航里程 (km) Driving Range	387 (等速计算法)
最高车速(km/h) Max. Speed	69
电机驱动形式 Motor Mode	永磁同步电机/水冷 PMSG, Water cooling
额定功率/最大功率 (kw) Rated Power/Peak Power	30/65
电池类型/电池容量 (kwh) Battery/Capacity	磷酸铁锂/动力蓄电池/81.1 LIFePO4/81.1
转向系统 Steering System	整体式动力转向, 电动液压助力 Integral power steering, electro-hydraulic power steering
悬架系统/制动系统 Suspension/Braking System	独立前桥 (单桥载重400kg) 独立后桥 (单桥载重5400kg) 气压双回路, 前后盘 Independent front axle (400kg load capacity), independent rear axle (5400kg loading capacity), Disc brake and dual circuit hydraulic brake system
车门及门架 Door System	前中后双门, 铝合金门体, 气动内摆乘客门, 配应急阀, 具有自动防夹功能 Front, middle and rear double leaf door, aluminum alloy pneumatic inner swing passenger door, Equip emergency valve, with automatic anti-pinch function
暖风/除霜 Warm Wind/Defrosting System	电动除霜器 (高压) Electric defroster(high voltage)
空调 Air Conditioning System	32000大卡顶置式电动冷暖空调 32000 kilocalorie overhead electric A/C

EV Electric bus

Generous and fashionable exteriors, luxury and comfortable interiors, brings the passengers with premium and cozy journey.



项目Item	技术参数Specification
外形尺寸 (mm) Dimension	10990 × 2500 × 3500,3600
轴距 (mm) Wheel Base	5700
最大总质量 (kg) Gross Vehicle Weight	17500
整备质量 (kg) Curb Weight	12200
载客人数 (人) Passenger Capacity	24-49
续航里程 (km) Driving Range	295
最高车速km/h Max. Speed	100
电机驱动形式 Motor Mode	三相交流异步电机, 水冷 Three-phase AC PMSM, Water cooling
额定功率/最大功率 (kw) Rated Power/Peak Power	80/160
电池类型/电池容量 (kwh) Battery/Capacity	磷酸铁锂/193.5,360Ah LiFePO4/193.5,360Ah
转向系统 Steering System	整体式动力转向, 电动液压助力 Integral power steering, electro-hydraulic power steering
悬架系统/制动系统 Suspension/Braking System	非独立式之气囊空气悬架/非独立式4气囊空气悬架, 前盘后鼓式双回路气制动+螺旋弹簧驻车制动 Non-independent Air suspension (SRS-2/SRS-4), dual circuit system, Front disc brake and rear drum brake+spring actuated and air cut-off braking
车门及门泵 Door System	气动外摆乘客门 Pneumatic outer swing passenger door
暖风/除霜 Warm Wind/Defrosting System	电动除霜器 Electric defroster
空调 Air Conditioning System	32000大卡顶置式电动冷暖空调 32000 kcal/cab over head electric air C

Double deck electric city bus

Avant-garde design. Broader Vision | Larger Space!
To view the world at a higher level, to enjoy beauty of the city.



项目Item	技术参数Specification
外形尺寸 (mm) Dimension	12400 × 2550 × 4200
轴距 (mm) Wheel Base	6000+1500
前悬/后悬(mm) Front and rear suspension	2310/2590
最大总质量 (kg) Gross Vehicle Weight	24200
整备质量 (kg) Curb Weight	16500
载客人数 (人) Passenger Capacity	29+1+49
续航里程 (km) Driving Range	≥250
最高车速km/h Max. Speed	69
最小转弯半径 Minimum turning radius	≤24
爬坡能力 Gradeability	≥17
电机驱动形式 Motor Mode	永磁同步电机/液体冷却 Permanent magnet synchronous motor/liquid cooling
额定功率/最大功率 (kw) Rated Power/Peak Power	200/300
电池类型/电池容量 (kwh) Battery/Capacity	磷酸铁锂 LiFePO4
转向系统 Steering System	整体式动力转向, 电动液压助力 Integral power steering, electro-hydraulic power steering
车门及门泵 Door System	前后双门, 铝合金门体, 气动内摆乘客门, 配置急刹, 具有自动防夹功能 Front and rear double leaf door/aluminum alloy pneumatic inner swing passenger door/Equip emergency valve, with automatic anti-pinch function
暖风/除霜 Warm Wind/Defrosting System	电动除霜器 (高压) Electric defroster/high voltage
空调 Air Conditioning System	5000大卡双扇电动客车空调 5000 kcal/cab over head electric bus A/C

Electric airport shuttle bus

Innovative design | Splendid outline
Unique 3D modeling design, it is one of the most spacious airport shuttle bus, more space and more comfortable.
3 passenger doors of each side. Dual A/C system adopted in different zone and with adjustable function.



项目Item	技术参数Specification
外形尺寸 (mm) Dimension	14000 × 3100 × 3100
轴距 (mm) Wheel Base	7100
最大总质量 (kg) Gross Vehicle Weight	20000
整备质量 (kg) Curb Weight	12000
载客人数 (人) Passenger Capacity	120
续航里程 (km) Driving Range	200
最高车速km/h Max. Speed	50
电机驱动形式 Motor Mode	永磁同步电机/水冷 PMSM, Water cooling
额定功率/最大功率 (kw) Rated Power/Peak Power	135/200
电池类型/电池容量 (kwh) Battery/Capacity	磷酸铁锂/200 LiFePO4/200
转向系统 Steering System	整体式动力转向, 电动液压助力 Integral power steering, electro-hydraulic power steering
悬架系统/制动系统 Suspension/Braking System	空气独立悬架/前盘后鼓气制动, 螺旋弹簧气制动 Independent air suspension, Front and rear disc brake, spring actuated and air cut-off parking brake.
车门及门泵 Door System	前正、副单外摆乘客门/后6个电控气动双外摆门 Driver's door is single leaf out swing door, 6 passenger door is electronically controlled pneumatic double leaf out swing door.
暖风/除霜 Warm Wind/Defrosting System	电动除霜器 Electric defroster
空调 Air Conditioning System	前驾驶室8000Kcal/h单区空调, 后乘客区36000Kcal/h冷空调 Front cab 8000Kcal/h cooling air conditioner, Rear passenger area 36000Kcal/h cooling air conditioner.

Pure electric Coaster series 6-8m

Classic & Fashion Low Carbon
 "Coaster" series covers the length of 6-8meters,all adopted European mature chassis,more stability and better performance.
 Electric motor drive and CVT gives smooth driving,service nicely for urban touring group and other high-end market.



项目Item	技术参数Specification		
车型型号	CDL6606LRBEV	CDL6700LRBEV	CDL6810LRBEV
外形尺寸 (mm) Dimension	6010 × 2050 × 2690, 2620	6990 × 2025 × 2750	8060 × 2160 × 2630, 2860
轴距 (mm) Wheel Base	3200	3935	4500
最大总质量 (kg) Gross Vehicle Weight	6360	6300	9000
整备质量 (kg) Curb Weight	4100,4200	4300	5800,6000
载客人数 (人) Passenger Capacity	10-19	22	24-31
续航里程 (km) Driving Range	>250		250
最高车速km/h Max. Speed	100		
电机驱动形式 Motor Mode	永磁同步电机, 水冷 PMSM, Water cooling		
额定功率/最大功率 (kw) Rated Power/Peak Power	75/140	55/100	永磁同步电机, 液体冷却 PMSM, Water cooling
电池类型/电池容量 (kwh) Battery/Capacity	磷酸铁锂/60, 8/61.4 LiFePO4/60, 8/61.4	磷酸铁锂/60, 83 LiFePO4/60, 83	磷酸铁锂/92, 4/92, 16 LiFePO4/92, 24/92, 16
转向系统 Steering System	整体式动力转向, 电动液压助力 PMSM, Water cooling		
悬架系统/制动系统 Suspension/Braking System	前10后10前3后4少片簧; 前后双向作用筒式减振器/ 前盘后鼓式气制动, 弹簧储能气制动 leaf spring suspension (F10, R/R10, 4), two-way cartridge damper, drum air brake, spring actuated and air cut-off parking brake		
车门及门泵 Door System	驾驶员门; 气动外展乘客门 Driver door, Pneumatic outer swing passenger door		
暖风除霜 Warm Wind/Defrosting System	电加热除霜器 Electric defroster		
空调 Air Conditioning System	8000大卡内置式电动冷暖空调 8000 kilocalorie overhead electric A/C		

EV1 Electric bus

Intelligent Stable and comfortable
 Refine inner with perfect shape, super long driving range, the outstanding steady performance, which are favored by the government,
 enterprise, and the special market.



项目Item	技术参数Specification
外形尺寸 (mm) Dimension	6005 × 1995 × 2650, 2800(含空调) (A/C)
轴距 (mm) Wheel Base	3665
最大总质量 (kg) Gross Vehicle Weight	4500
整备质量 (kg) Curb Weight	3250
载客人数 (人) Passenger Capacity	10-15
续航里程 (km) Driving Range	> 250
最高车速km/h Max. Speed	≤ 100
电机驱动形式 Motor Mode	永磁同步电机, 水冷 PMSM, Water cooling
额定功率/峰值功率 (kw) Rated Power/Peak Power	60/120
电池类型/电池容量 (kwh) Battery/Capacity	磷酸铁锂/57.6 LiFePO4/57.6
转向系统 Steering System	整体液压助力 Integral hydraulic power steering system
悬架系统/制动系统 Suspension/Braking System	前独立后钢板悬挂/双回路液压制动, 前盘后鼓式制动器, ABS带刹车间隙调整臂 Front independent suspension, rear leaf spring suspension (3/3 dual circuit hydraulic brake system, front disc brake and rear drum brake, ABS with slack adjusting bar
车门及门泵 Door System	手动前乘客门 Manual front passenger door
暖风除霜 Warm Wind/Defrosting System	除霜器 Defroster
空调 Air Conditioning System	1.单冷型(Cooling type) 2.冷暖两用PTC加热型 (长江以北地区) (Warming and cooling type, PTC heater) 3.冷暖两用热泵型 (长江以南地区) (Warming and cooling type, heat pump)

EV1 Electric bus

Premium quality Exclusive luxury
 Fashionable generous exterior, Spacious and comfortable driving space, being widely used in business reception,
 enterprise commuter bus and the group travel



项目Item	技术参数Specification
外形尺寸 (mm) Dimension	6070 × 1880 × 2320
轴距 (mm) Wheel Base	3720
最大总质量 (kg) Gross Vehicle Weight	4500
整备质量 (kg) Curb Weight	3050
载客人数 (人) Passenger Capacity	10-17
续航里程 (km) Driving Range	250
最高车速km/h Max. Speed	100
电机驱动形式 Motor Mode	集中驱动 centralized drive
额定功率/峰值功率 (kw) Rated Power/Peak Power	50/100
电池类型/电池容量 (kwh) Battery/Capacity	磷酸铁锂/53.7 LiFePO4/53.7
转向系统 Steering System	齿轮齿条式 Pinion-and-rack steering
悬架系统/制动系统 Suspension/Braking System	前独立悬架, 后钢板弹簧悬架; 液压制动, 真空助力, 前盘后鼓式 Front independent suspension and rear leaf spring suspension, hydraulic brake, front disc and rear drum, vacuum booster
车门及门泵 Door System	驾驶员脚踏制动踏板, 乘客区带中滑门, 尾部有逃生门, 共4门
暖风除霜 Warm Wind/Defrosting System	PTC电暖风 PTC electric heater
空调 Air Conditioning System	电动空调 Electric AC

EV Electric Logistics Van

经典延续 运力升级
经典的外观设计，超大电池容量，超长续航里程，满足远距物流配送需求。

Inheritance of Classic Upgrading capacity
Classical exterior design, super large battery capacity, leads to the over-long driving range, satisfy the requirements of long distance distribution.



项目Item	技术参数Specification
外形尺寸 (mm) Dimension	5300 × 1700 × 2050, 2250 (高顶)
轴距 (mm) Wheel Base	2890
最大总质量 (kg) Gross Vehicle Weight	3450
整备质量 (kg) Curb Weight	2460
额定载质量 (kg) Rated load	850; 665
续航里程 (km) Driving Range	350
最高车速km/h Max. Speed	100
额定功率/最大功率 (kw) Rated Power/Peak Power	45/87
电池类型/电池容量 (kwh) Battery/Capacity	三元锂/33.1 Li (NiCoMn) O2B3.1
转向系统 Steering System	齿条齿式 Rack and pinion style
悬架系统/制动系统 Suspension/Braking System	扭杆弹簧独立悬挂/钢板弹簧非独立悬架/真空助力/液压双回路前后鼓式 The torsion bar spring independent suspension, Rear leaf spring non-independent suspension, vacuum booster, Front disc brake and rear drum brake. Dual circuit hydraulic brake system
车门及门架 Door System	前门外开式，侧后滑轨式，后尾门外开式 Front swing door, rear sliding door, back lifting floor
暖风/除霜 Warm Wind/Defrosting System	/
空调 Air Conditioning System	/

EV2 Electric Logistics Van

Smart IOT High efficient space

Available for the "Internet plus", optimize the management of logistics distributions; super large storage space, dedicates to the city post, express service, e-commerce and such terminal logistics area. With the advantages of multipurpose, economical environment, safety and reliability.



项目Item	技术参数Specification
外形尺寸 (mm) Dimension	4030 × 1620 × 1900
轴距 (mm) Wheel Base	2700
最大总质量 (kg) Gross Vehicle Weight	2050
整备质量 (kg) Curb Weight	1350
额定载质量 (kg) Rated load	570, 440(2+280)
续航里程 (km) Driving Range	> 235
最高车速km/h Max. Speed	> 85
电机驱动形式 Motor Mode	永磁同步电机, 风冷 PMSM, Air cooling
额定功率/最大功率 (kw) Rated Power/Peak Power	20/45
电池类型/电池容量 (kwh) Battery/Capacity	三元锂/38.15 Li (NiCoMn) O2/38.15
转向系统 Steering System	齿条齿式, 电子助力 Rack and pinion, Electric power
悬架系统/制动系统 Suspension/Braking System	前麦弗逊式独立悬挂, 后钢板弹簧非独立悬架 / 前后鼓式液压双回路真空助力, 带感载阀 Front McPherson independent suspension, rear steel plate spring, non-independent suspension / Front disc brake and rear drum brake, Hydraulic dual pipe vacuum booster, with load sensing valve
车门及门架 Door System	前门外开式，侧后滑轨式，后尾门外开式 Front swing door, rear sliding door, back lifting floor
暖风/除霜 Warm Wind/Defrosting System	/
空调 Air Conditioning System	/

EV Electric Logistics Van

Super spacious Fresh experience

"Internet + City green logistics", prior management for logistics distribution, fit for the middle-long distance delivery. It is characterized with large capacity, multipurpose, green and safe etc.



项目Item	技术参数Specification
外形尺寸 (mm) Dimension	4100 × 1500 × 2460
轴距 (mm) Wheel Base	2200
最大总质量 (kg) Gross Vehicle Weight	2180
整备质量 (kg) Curb Weight	1370
额定载质量 (kg) Rated load	680
续航里程 (km) Driving Range	215
最高车速km/h Max. Speed	80
电机驱动形式 Motor Mode	永磁同步电机, 风冷 PMSM, Air cooling
额定功率/最大功率 (kw) Rated Power/Peak Power	24/46
电池类型/电池容量 (kwh) Battery/Capacity	三元锂/42 Li (NiCoMn) O2/ 42
转向系统 Steering System	循环球式 Recirculating ball steering
悬架系统/制动系统 Suspension/Braking System	前后钢板弹簧非独立悬架/液压双回路制动 Front/Rear non-independent leaf spring suspension/Dual circuit hydraulic brake system
车门及门架 Door System	前门外开式，侧后滑轨式，后尾门外开式 Front swing door, rear sliding door, back lifting floor
暖风/除霜 Warm Wind/Defrosting System	/
空调 Air Conditioning System	/