

1. Economic container house introduction:

1.Activity: removable and repeated use.

2.Quick assembly: short finish time, without foundation.

3. Safety: light steel structure, anti-typhoon, anti-earthquake.

4.Economic and high quality, can be stacked for 2 floors.

2.Technical Information

No	Project name	Value
1	Seismic grade	7-magnitude
2	Wind loading	8 level of wind loading
3	Floor loading	200kg/m2

3.Project Cases








Informations:

Outer Length: 6000mm,Inner Length: 5800mm Outer Width: 2460mm,Inner Width: 2260mm Outer Height: 2600mm,Inner Height: 2400mm

4.Drawing

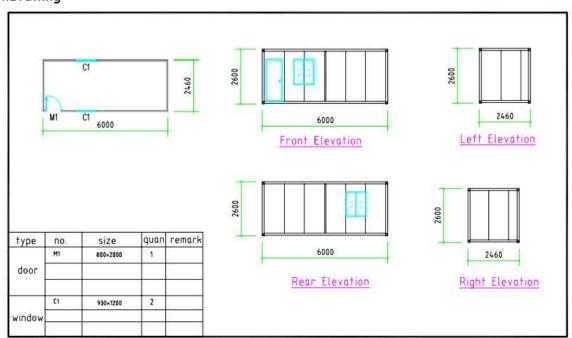


5.Details Quotation

No. Component Material Photo



1	Chassis	100*100 square tube	
		10# C steel purlin	
		15mm cement board	
2	Wall Panel	50mm EPS sandwich panel	
3	Comer Column	100*100 square tube	
4	Middle column	50*50 Square tube	B
5	Roof	100*100 square tube	
		50mm EPS sandwich panel	

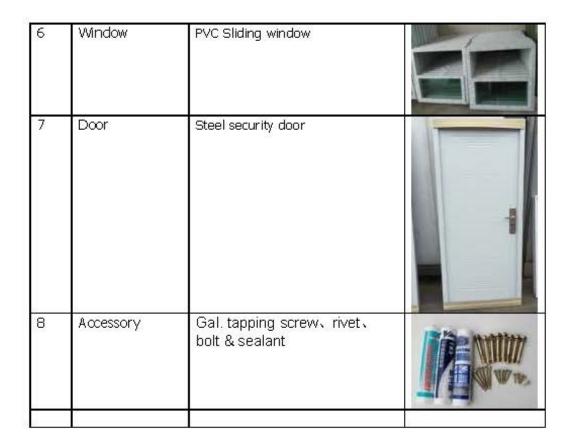

FOB foshan Price: \$2,290 /units(MOQ IS 5 SETS)

Remarks:

- 1. Minimum order is 5 units.
- 2. the validity period of the quotation is 14 days
- 3. T/T50% deposit, 50% balance before loading from factory.
- 4.Packing Information

Disassemble, 40HQ can load 12 units, 20GP can load 5 sets



1. Economic container house introduction:

1.Activity: removable and repeated use.

2. Quick assembly: short finish time, without foundation.

3. Safety: light steel structure, anti-typhoon, anti-earthquake.

4. Economic and high quality, can be stacked for 2 floors.

2.Technical Information

No	Project name	Value
1	Seismic grade	7-magnitude
2	Wind loading	8 level of wind loading
3	Floor loading	200kg/m2

3.Project Cases








Informations:

Outer Length: 5760mm,Inner Length:5660mm Outer Width:2440mm,Inner Width:2240mm Outer Height: 2400mm,Inner Height:2300mm

4.Drawing

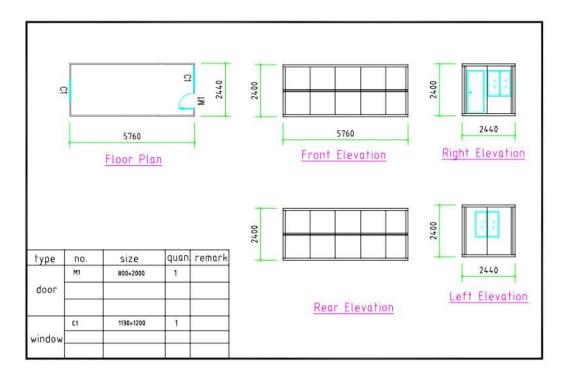

5.Details Quotation

No.	Component	Material	Photo
1	Chassis	3.0 mm Cold form steel	
		8# C steel purlin	
		15mm cement board	
2	Wall Panel	50mm EPS sandwich panel	

	Side wall beam	2mm Cold form steel	
3	Roof beam	2mm Cold form steel	
		50mm EPS sandwich panel	
4	Window	PVC Sliding window	
5	Door	Steel security door	
6	Accessory	Gal. tapping screw rivet bolt & sealant	

FOB foshan Price:\$2,490 /units(MOQ IS 12 SETS)



Remarks:

- 1. Minimum order is 12 units.
- 2. the validity period of the quotation is 14 days
- 3. T/T 50% deposit, 50% balance before loading from factory.
- 4. Packing Information
- 5. 40HQ can load 12 units









LIGHT STEEL STRUCTURE



- Container house
- Warehouse
- K house
- Flat/Slop roof house
- Villa



Container House Promotion

Product introduction

Container mobile house, also known as camping house, container apartment housing, is adopt container technology (also can adopt market standard steel material as main skeleton). Taking sandwich panel as wall panel, standard modulus as space assembled. The components use welded and bolts to combination. Bottom use plywood or MGO board as flooring. At the same time can use a variety of ceramic as surface decoration. Making the inside space neat and bright. It is a new concept of green economic type container house. Conveniently quick lifting and transport, to achieve universal standardization of temporary buildings. Establish environmental protection and energy saving, efficient buildings concept. Make the temporary houses into the field of developing, manufacturing, and supporting supply, can be stocked and recycling.

Advantages and features

- 1.Activity:removable and repeated use.
- 2. Quick assembly: short finish time, without foundation.
- 3. Safety: light steel structure, anti-typhoon, anti-earthquake
- 4. Durability: corrosion resistance, acid resistance, not easy to get rust. the span life can be achieve 10 years above.
- 5. Economical: low cost, high quality.
- 6.Combination: can be free combination, or stacked for 2 floors.

Application

- 1.Booth canteen mobile store mobile toilet and bathroom.
- 2. Motel hotel restaurants and civilian residence field etc.
- 3. Project construction site office and residence.
- 4. Emergency disaster rescue temporary command center, hospitals, canteens, schools.
- 5. Industry temporary office, stockage room, canteen, equipment control room.
- 6. Field and outdoor working industry.
- 7. Beauty spot, garden small house, vacation room.

Technical Information

No.	Project name	value	
1	Seismic grade	7 grade	
2	Wind loading	8 grade	
3	Floor loading	200kg/m2	

Installation steps

container house is according to the instruction drawing to assemble. Easy and quick assembly, only need 2-3 workers, within 3 hours to finish assembly. Can be freely combination by many same specification containers, to achieve completion of buildings. Apply field can be develop to site office, dormitory, school building, city store, entertainment room, theatre etc.




EVERYTHING under sun

Luxury disassembled container, before deliver to the customers, all the main components, window and door, bolts etc have been packed into the small container. Before assembly, open the container, according to the instruction steps to work. Easy and quick assembly, only need 2–3 people, with 3 hours to finish.















B2 B4 B1 B1 B1 B1 B1 B1 B1














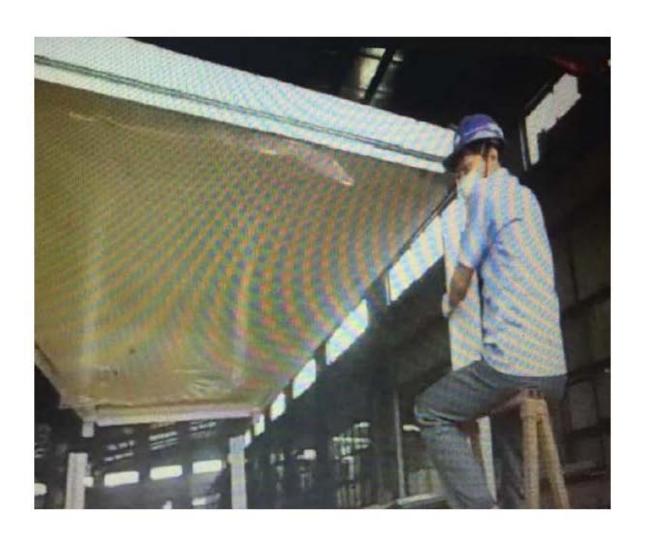







Product Standard size: 2.438m (width) *5.9m (length) *2.74m (height)













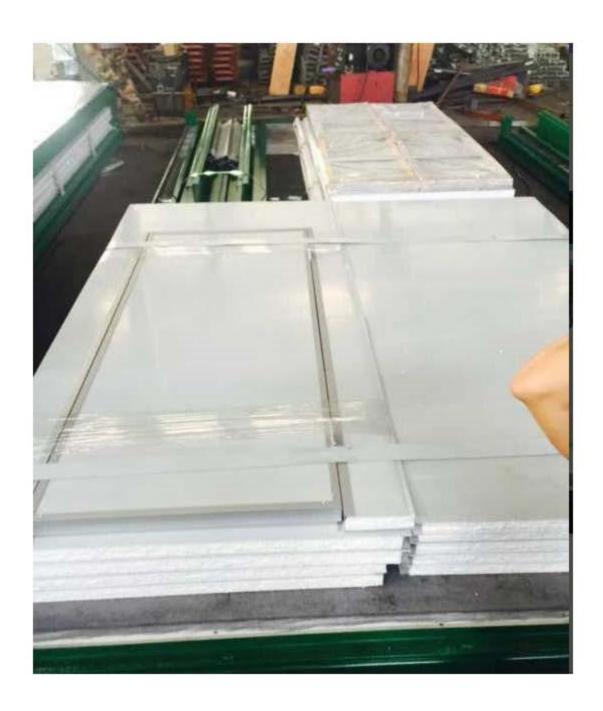





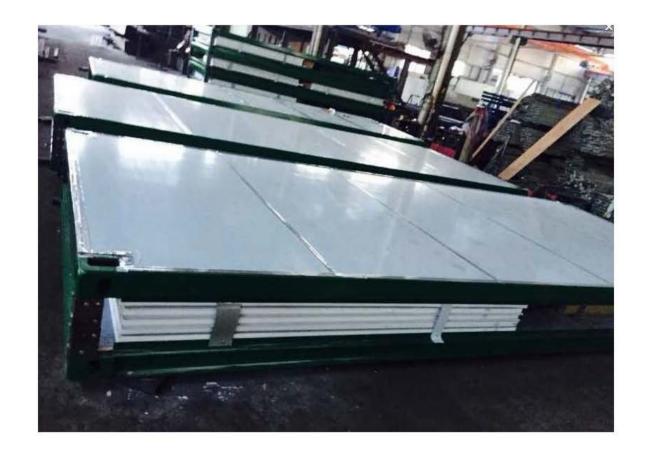





+. High quality material list(2.438m*5.9m*2.74m)

No.	component	Material	Refer photo
1	Chassis	C chanel steel	
	Purlin	10# C Steel	

	flooring	15mm cement board	
2	Wall panel	50mm EPS sandwich panel	
3	Corner column	3.0 mm Cold form steel	
4	Roof structure	3.0 mm Cold form steel	
5	Roof panel	75mm EPS sandwich panel	

6	Door panel	Steel security door	
7	Window	PVC WINDOW	
8	Accessories	Nuts tapping screw rivet sealant etc.	
84. 64.			

Fob foshan price: \$2990/unit









Remark:

- 1.Minimum order is 8 units.
- 2.the validity period of the quotation is 14 days 3.T/T 50% deposit, 50% balance before loading from factory.