


monocrystalline solar panel

peak current can reach 2A

Protecting phones from damaged

Rainproof, anti-splashing

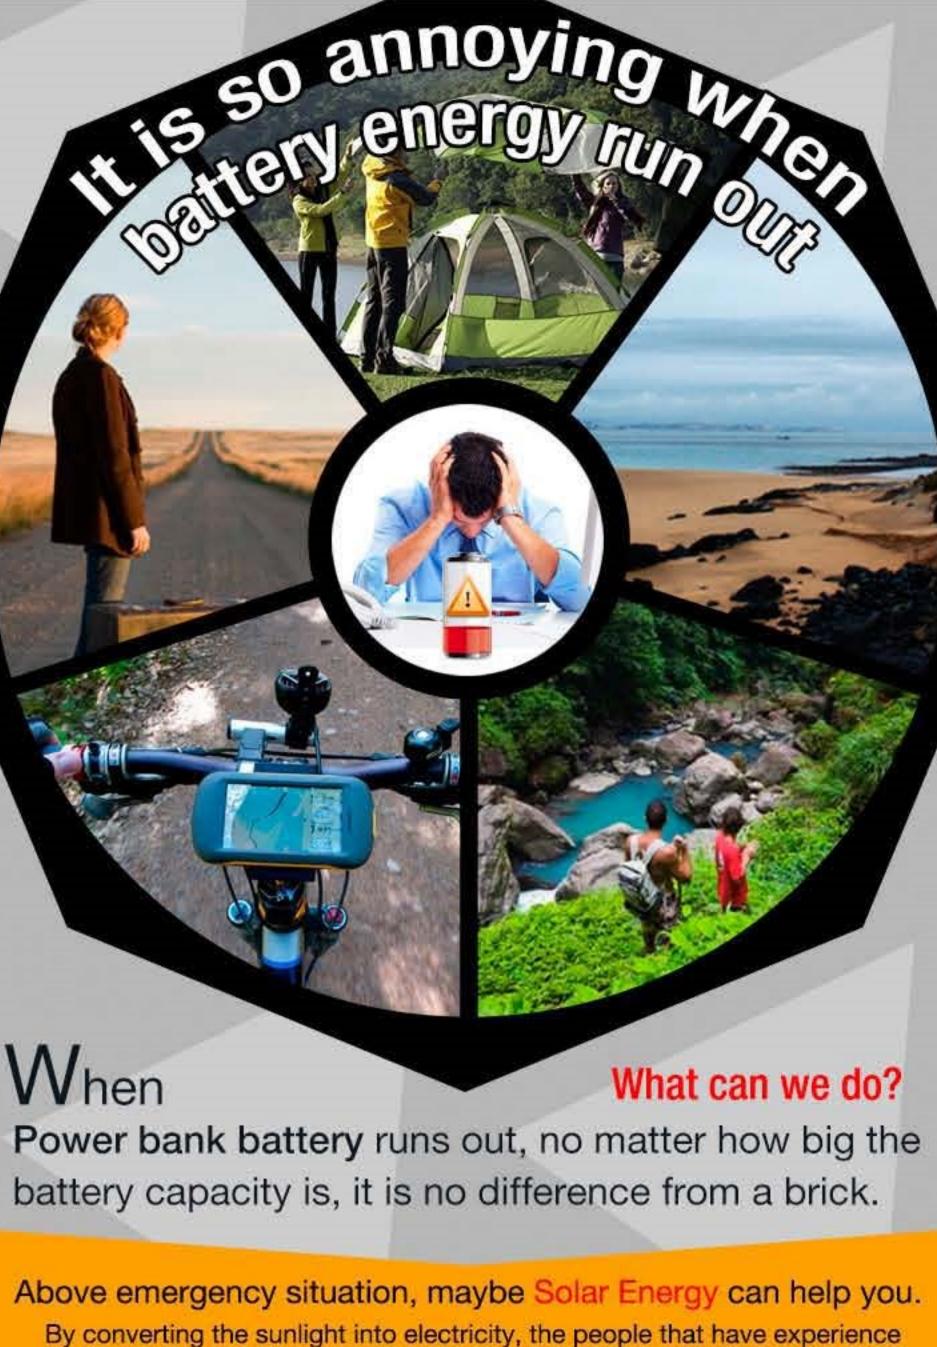

PRODUCT FEATURES

exposing to sunlight will understand!



mono solar panel








performance, very durable, and very long lifespan.

No internal batteries





is high. We use new ETFE lamination technology, and deep lamination embross technology, has a better light transmitting, so that it absorbs more sunlight. And it is stronger, higher waterproof

Crystal solar panel

Monocrystalline solar panel

Sun light conversion efficiency

Sun light conversion efficiency

18%-21%

It is one of the highest convert ratio solar wafer. The charging efficiency



Compatible charging,







compatible for charging iPhone, Samsung, Xiaomi Meizu, HTC, Google, Blackberry or iPads etc. Can also charge some digital camera, or PSP, power banks, bluetooth speakers, can provide devices with the necessary current automatically, so that the charging can be very fast.



Specially designed for charging iPhone series;

With auto resume charging function

no need to operated by user.

waterproof dust-proof

accumulated easily.

Port "I"

FE integrated lamination, more lightweight more portable

The solar panel is waterproof,

and eco-friendly

Without battery inside, no need to worry any problems that caused by high

The USB connector is not waterproof

USB dual output charge controller

Port "A"

A for Android, i for iOS.

Charging >0.5A Blue

Can charge for Andoird phones

The advantage of ETFE film 1, Highly dustproof, easy for cleaning; 2, Lifespan will be 8-12years. 3, Light transmitting can be 95%; 4, The material can be recycled or reuse; 5, It can be self-clearned, the dust will not be

We use integrated ETFE lamination technology, lighter weight, waterproof,

the emboss on surface, can help sunlight evenly distributet to

the solar wafers, helping the improvement of charging.

No lithium battery included Safe,

termperature or sunlight exposure.

dustproof, and shock-resistant. It can withstand outdooer severe circumstance,

at the backof product.

PRODUCT FUNCTION INTRODUCTION



1.5mm 14mm

227mm 380mm 190mm * Because the size is measured by hand, there may be little tolerance in

sizes, please refer to the actual product for accurate sizes.

