

## Economic Container House

### 1. Economic container house introduction:

1. Activity : removable and repeated use.
2. Quick assembly : short finish time, without foundation.
3. Safety: light steel structure, anti-typhoon, anti-earthquake.
4. Economic and high quality, can be stacked for 2 floors.

### 2. Technical Information

No	Project name	Value
1	Seismic grade	7-magnitude
2	Wind loading	8 level of wind loading
3	Floor loading	200kg/m <sup>2</sup>

### 3. Project Cases







**Informations:**







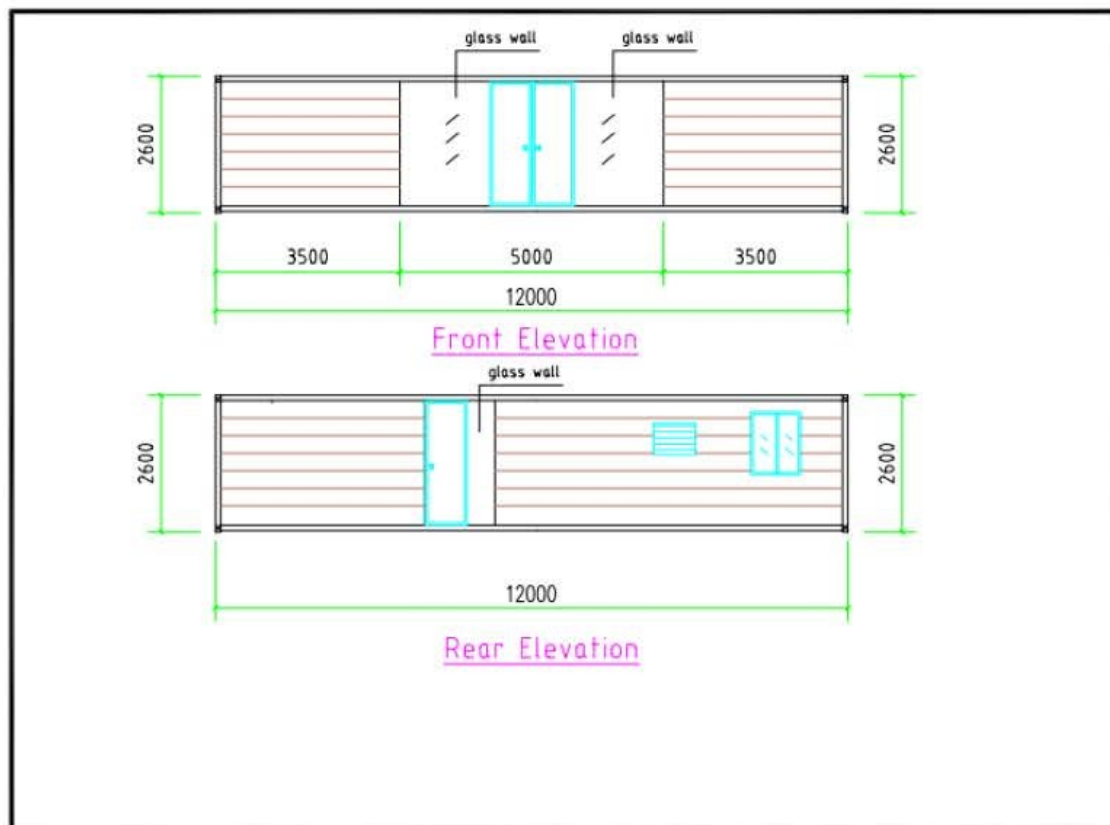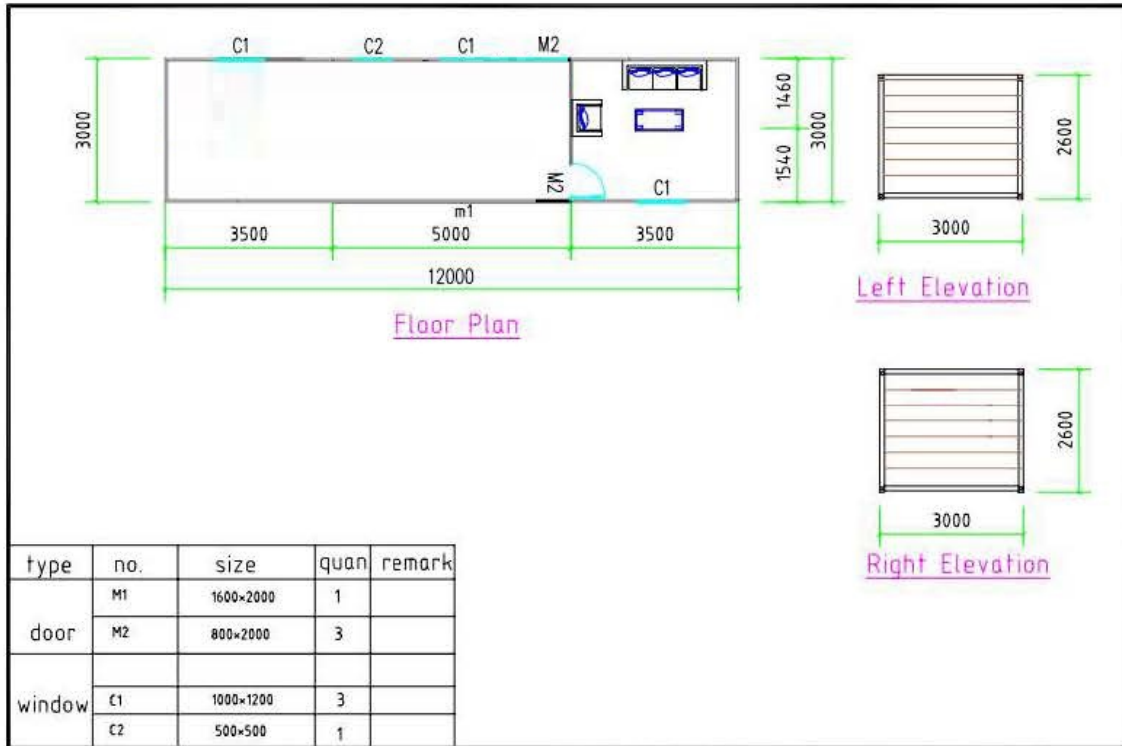

Outer Length: 12000mm

Outer Width: 3000mm

Outer Height: 2600mm



## 5.Details Quotation

No.	Component	Material	Photo
1	Chassis	100*100 square tube	
		10# C steel purlin	
		15mm cement board	
		Ceramic tile( inside)	
2	Wall Panel	75mm glasswool sandwich panel	
		Pvc wood clading	
3	Corner Column	100*100 square tube	
4	Middle column	50*50 Square tube	

5	Roof	100*100 square tube	
		50mm glasswool sandwich panel	
		30mm eps sandwich panel	
6	Window	aluminum window	
		Stainless steel security net	
7	Door	Aluminum glass door(entrance door)	
8	Accessory	Gal. tapping screw, rivet, bolt & sealant	

**FOB foshan**



- 1. Minimum order is 4 units.**
- 2. the validity period of the quotation is 14 days**
- 3. T/T 50% deposit, 50% balance before loading from factory.**
- 4. This price is not include water electric system,kitchen cabinet,stove)**
- 5. Packing Information**

Disassemble, 40HQ can load 4 units



# Office container house

---

➤ Container office is a new type of activity room, adopting advanced modern home design, using lightweight steel, high-quality fire-proof sandwich panels, as well as a full range of indoor facilities. It is mobile and recycling, safety and environmental protection, economic efficiency and other advantages.



# Office container house

---







# Bedroom container house



# Toilet container house

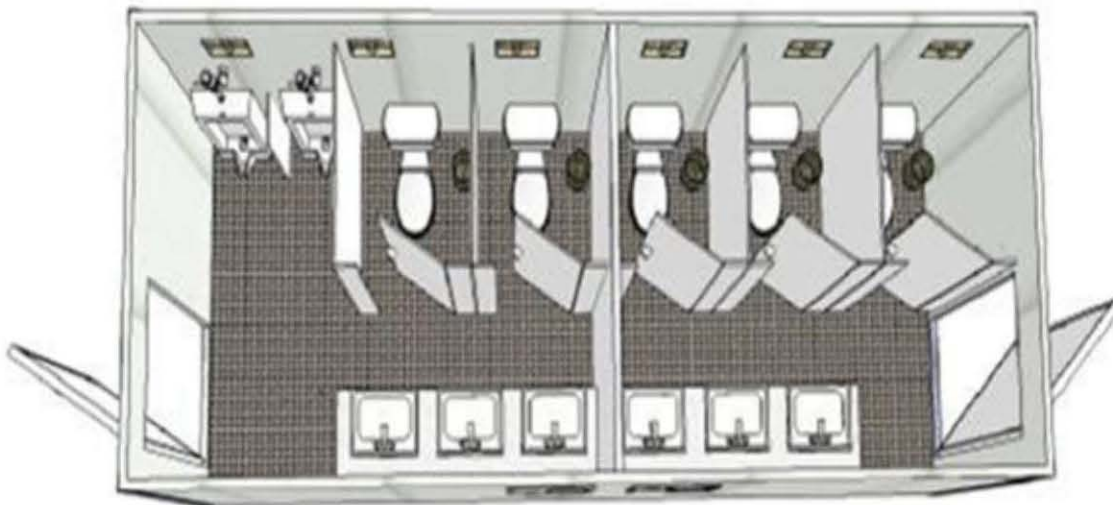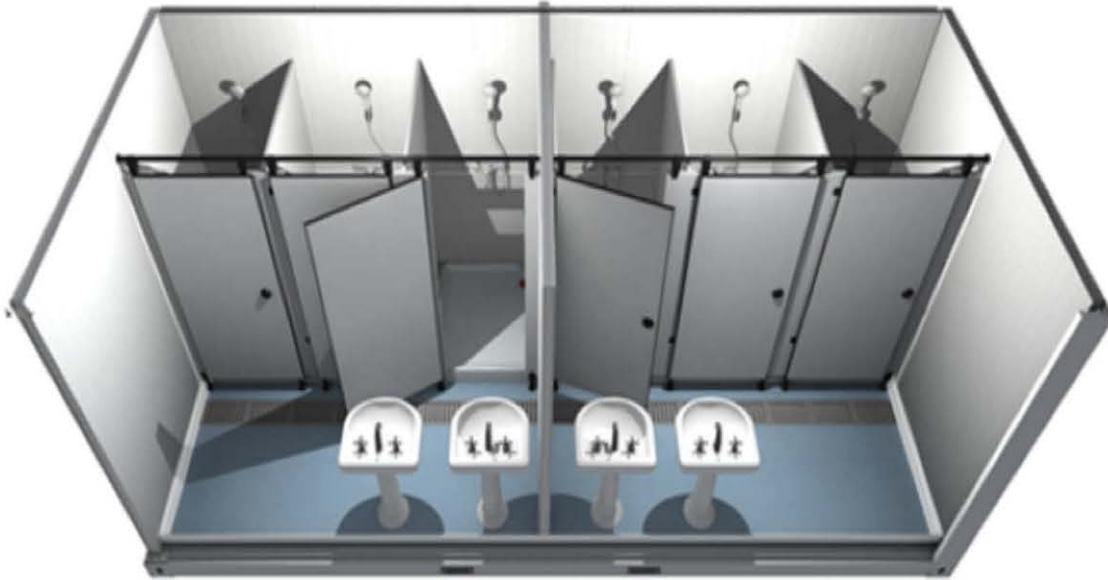

# Container house

Details



Glass door



Sliding window



Shutters window



Light



Switch



Socket



Electric distribution



Leakage switch



# Container Packaged In Bulk

Package and loading



12units in 40 HQ container



# Container Packaged In Bulk

## Installation



# Container Packaged In Bulk

---

→ **Installation details**



# Container Packaged In Bulk

→ **Main material**

NO.	Component	Material	Photo
1	Chassis	100*100 square tube	
		10# C steel purlin	
		15mm cement board	
2	Wall Panel	50mm EPS sandwich panel	
3	Corner Column	100*100 square tube	
4	Middle Column	50*50 square tube	
5	Roof	100*100 square tube	
		50mm EPS sandwich panel	
6	Window	PVC Sliding window	
7	Door	Steel security door	
8	Accessory	Gal.tapping screw,rivet,bolt&sealant	



# Flat Pack Container

Package and loading



**8 units in 40HQ container.**





# Flat Pack Container

Installation

