

PCR TIRE CATALOGUE

***HP / UHP / HT / AT / MT
Winter / All Season / ST Radial***





ABOUT US

Your professional, reliable and innovative tyre supplier.

Established in 2006, a professional tyres manufacturer and supplier based in China sold to 130 countries around the world. headquarterd in Qingdao, one of the busiest business trading port in China. We also opened up Singapore branch for Southeast Asia market. Furthermore, the European branch office is currently under construction.



ADVANTAGES

Product Range

We provide a complete series of PCR tyres that satisfy your need in one-stop and save your cost.

*PCR / UHP / HT / SUV / CUV / RUN FLAT
AT / MT / WINTER / ALL SEASON / RACING*

Exclusive Brands

registered brand covering 50+ countries.

Exclusivity is possible under the condition that our cooperation has been good - which protects your effort to promote a brand all the time.

Warranty and Insurance

We offer warranty for each pieces tires we sell within production date for production fault, no worry about the after sale service.

PLI amount is 10 Million dollars covering all countries, which provides strong confidence for customers.



Quality Control

PCR owns 10+ certificates and passed related quality tests including but not restricted to:

*GCC / ISO / CCC / SONCAP / ECE
DOT / BIS / IMTRO / LATU / REACH*

Strong Inventory

Around 100,000 pcs PCR inventories for market popular sizes are in circular flow in our warehouse to help customers achieve quick delivery.

Customer Support





Besides competitive price and quick delivery, we will also support you to sell by offering promotion materials such as T-shirt, hats posters and so on.

Market Reach

With the headquarter in China, Southeast Asia branch office in Singapore and the branch to be established in Europe, our team is extremely close to the market to get updated with market demand, so that we could provide our customers with newer and better tyres timely.



High Performance Tire for Passenger

-  All season economic passenger range designed for low noise and comfort.
-  Wide circumferential grooves for enhanced water drainage and wet performance.
-  Optimized tread pitch sequence designed for low noise and comfort.
-  Full width spiral nylon cap ply ensures footprint stability and durability.

Size	Load Index	Speed Rating	Sidewall	UTQG	Standard Rim	O.D. (mm)	S.W. (mm)	Tread Depth (mm)	Max Load (kg)	Max Pressure (kPa)
155/70R13	75	T	BSW	400AA	4½J	548	157	7.6	387	300
155/80R13	79	T	BSW	400AA	4½J	578	157	7.6	437	300
165/65R13	77	T	BSW	400AA	5J	544	170	7.6	412	300
165/70R13	79	T	BSW	400AA	5J	562	170	7.6	437	300
165/80R13	83	T	BSW	400AA	4½J	594	165	7.6	487	300
175/60R13	77	T	BSW	400AA	5J	540	177	7.6	412	300
175/70R13	82	T	BSW	400AA	5J	576	177	7.8	475	300
185/70R13	86	H	BSW	400AA	5½J	590	189	7.8	530	300
155/65R14	75	T	BSW	400AA	4½J	558	157	7.3	387	300
165/60R14	75	H	BSW	400AA	5J	554	170	7.3	387	300
165/70R14	81	T	BSW	400AA	5J	588	170	7.6	462	300
175/65R14	82	H	BSW	400AA	5J	584	177	7.6	475	300
175/65R14	86	T XL	BSW	400AA	5J	584	177	7.6	530	300
175/70R14	84	T	BSW	400AA	5J	602	177	7.6	500	300
185/60R14	82	H	BSW	400AA	5½J	578	189	7.8	475	300
185/65R14	86	H	BSW	400AA	5½J	596	189	7.8	530	300
185/70R14	88	H	BSW	400AA	5½J	616	189	8.0	560	300
195/60R14	86	H	BSW	400AA	6J	590	201	7.8	530	300
195/65R14	89	H	BSW	400AA	6J	610	201	8.0	580	300
195/70R14	91	H	BSW	400AA	6J	630	201	8.0	615	300
205/60R14	88	H	BSW	400AA	6J	602	209	8.0	560	300
205/70R14	95	H	BSW	400AA	6J	644	209	8.2	690	300
215/70R14	96	H	BSW	400AA	6½J	658	221	8.2	710	300
175/65R15	84	H	BSW	400AA	5J	609	177	7.3	500	300
185/55R15	82	V	BSW	400AA	6J	585	194	8.0	475	300
185/60R15	88	H XL	BSW	400AA	5½J	603	189	8.0	560	340
185/65R15	88	H	BSW	400AA	5½J	621	189	8.0	560	300
195/50R15	82	H	BSW	400AA	6J	577	201	8.0	475	300
195/55R15	85	V	BSW	400AA	6J	595	201	8.0	515	300
195/60R15	88	H	BSW	400AA	6J	615	201	8.0	560	300
195/65R15	91	H	BSW	400AA	6J	635	201	7.6	615	300
195/65R15	91	V	BSW	400AA	6J	635	201	7.6	615	300

F1

r Cars

comfortable ride with long tread life.

performance.

ty.










Size	Load Index	Speed Rating	Sidewall	UTQG	Standard Rim	O.D. (mm)	S.W. (mm)	Tread Depth (mm)	Max Load (kg)	Max Pressure (kPa)
205/60R15	91	H	BSW	400AA	6J	627	209	8.0	615	300
205/65R15	94	H	BSW	400AA	6J	647	209	8.2	670	300
205/65R15	94	V	BSW	400AA	6J	647	209	8.2	670	300
205/70R15	96	H	BSW	400AA	6J	669	209	8.2	710	300
215/60R15	94	H	BSW	400AA	6½J	639	221	8.2	670	300
215/65R15	96	H	BSW	400AA	6½J	661	221	8.2	710	300
215/70R15	98	H	BSW	400AA	6½J	683	221	8.2	750	300
225/60R15	96	V	BSW	400AA	6½J	651	228	8.2	710	300
195/50R16	84	V	BSW	400AA	6J	602	201	7.5	500	300
195/55R16	91	V XL	BSW	400AA	6J	620	201	8.2	615	300
195/60R16	89	H	BSW	400AA	6J	640	201	8.2	580	300
205/55R16	94	V XL	BSW	400AA	6½J	632	214	8.2	615	300
205/60R16	92	H	BSW	400AA	6J	652	209	8.2	630	300
205/65R16	95	H	BSW	400AA	6J	672	209	8.2	690	300
215/55R16	93	V	BSW	400AA	7J	642	226	8.2	650	300
215/55R16	97	W XL	BSW	400AA	7J	642	226	8.2	730	340
215/60R16	95	H	BSW	400AA	6½J	664	221	8.2	690	300
215/65R16	98	H	BSW	400AA	6½J	686	221	8.2	750	300
225/55R16	95	V	BSW	400AA	7J	654	233	8.2	690	300
225/60R16	98	H	BSW	400AA	6½J	676	228	8.2	750	300
235/60R16	100	H	BSW	400AA	7J	688	240	8.2	800	300
215/55R17	94	V	BSW	400AA	7J	668	226	8.2	670	300
225/55R17	101	H XL	BSW	400AA	7J	680	233	8.2	825	340
165/65R13	77	T	WSW	400AA	4½J	544	170	7.6	412	300
175/70R13	82	T	WSW	400AA	5J	576	177	7.8	475	300
185/70R14	88	H	WSW	400AA	5½J	616	189	8.0	560	300
195/70R14	91	H	WSW	400AA	6J	630	201	8.0	615	300
195/65R15	91	H	WSW	400AA	6J	635	201	7.6	615	300
185/70R14	88	H	OWL	400AA	5½J	616	189	8.0	560	300
195/70R14	91	H	OWL	400AA	6J	630	201	8.0	615	300
195/65R15	91	H	OWL	400AA	6J	635	201	7.6	615	300

CF18



High Performance Tire For Passenger Cars

-  All season performance range designed for comfort and low noise while offering superior wet and dry traction with good handling performance and safety under both wet and dry conditions.
-  Jointless spiral wrap full nylon cap ply technology for high speed stability and strength.
-  Customized tread compound provides excellent grip in both wet and dry conditions combined with superior tread life.
-  Optimized tread compound provides superior grip and exceptional mileage and low noise.




Size	Load Index	Speed Rating	Sidewall	UTQG	O.D. (mm)	S.W. (mm)	Tread Depth (mm)	 RR	 WG	 NOISE
155/70R13	75	T	BSW	360 AA	548	157	7.2	E	B	69
165/65R13	77	H	BSW	360 AA	544	170	7.5	E	B	69
165/70R13	79	T	BSW	360 AA	562	170	7.2	E	B	69
165/80R13	83	T	BSW	360AA	594	165	7.2	E	B	69
175/70R13	82	T	BSW	360 AA	576	177	7.2	E	B	69
185/70R13	86	H	BSW	400 AA	590	189	7.2	C	B	69
155/65R14	75	T	BSW	360 AA	558	157	7.2	E	B	69
155/70R14	77	T	BSW	360AA	574	157	7.2	E	B	69
165/60R14	75	H	BSW	400 AA	554	170	7.5	E	B	69
165/65R14	79	T	BSW	400 AA	570	170	7.5	E	B	69
165/70R14	81	T	BSW	360 AA	588	170	7.2	E	B	69
175/65R14	82	T	BSW	400 AA	584	177	7.5	E	B	69
175/65R14	82	H	BSW	400 AA	584	177	7.5	E	B	69
175/70R14	84	H	BSW	360 AA	602	177	7.2	E	B	69
185/60R14	82	H	BSW	400 AA	578	189	7.5	E	B	69
185/65R14	86	H	BSW	400 AA	596	189	7.5	E	B	69
185/70R14	88	H	BSW	400 AA	616	189	7.2	C	B	69
195/60R14	86	H	BSW	400 AA	590	201	7.5	C	B	69
195/70R14	91	H	BSW	400 AA	630	201	7.5	C	B	69
175/60R15	81	H	BSW	360AA	591	177	7.5	E	B	69
175/65R15	84	H	BSW	360AA	609	177	7.5	E	B	69
185/55R15	82	V	BSW	400 AA	585	194	7.5	E	B	69
185/60R15	84	H	BSW	400 AA	603	189	7.5	E	B	69
185/60R15	88	H XL	BSW	400 AA	603	189	7.5	E	B	69
185/65R15	88	H	BSW	400 AA	621	189	7.5	E	B	69
195/60R15	88	H	BSW	400 AA	615	201	7.5	E	B	69
195/60R15	88	V	BSW	400 AA	615	201	7.5	E	B	69
195/65R15	91	H	BSW	400 AA	635	201	7.5	C	B	69
195/65R15	91	V	BSW	400 AA	635	201	7.5	C	B	69
195/65R15	95	T	BSW	400 AA	635	201	7.5	C	B	69

CF19

Ultra High Performance Tire For Passenger Cars




-  Asymmetrical tread pattern designed for ultimate control during cornering and traction while braking and accelerating.
-  Jointless spiral wrap full nylon cap ply technology for high speed stability and added strength.
-  Computer optimized tread arrangement offers smooth ride.
-  Low profile design offers exceptional control and high speed stability.
-  Specially formulated tread compound provides excellent grip in both wet and dry conditions.

Size	Load Index	Speed Rating	Sidewall	UTQG	O.D. (mm)	S.W. (mm)	Tread Depth (mm)	 RR	 WG	 NOISE
195/50R15	82	V	BSW	400 AA	577	201	7.8	E	B	69
195/55R15	85	V	BSW	400 AA	595	201	7.8	E	B	69
205/60R15	91	V	BSW	400 AA	627	209	7.8	C	B	69
205/65R15	94	V	BSW	400 AA	647	209	7.8	C	B	69
205/70R15	96	H	BSW	400 AA	669	209	7.8	C	B	69
195/45R16	84	V	BSW	400 AA	582	195	7.8	C	B	69
195/50R16	84	V	BSW	400 AA	602	201	7.8	C	B	69
195/55R16	87	V	BSW	400 AA	620	201	7.8	C	B	69
195/55R16	91	W	BSW	400 AA	620	201	7.8	C	B	69
205/50R16	87	W	BSW	400 AA	612	214	7.8	C	B	69
205/55R16	91	V	BSW	320 AA	632	214	7.8	C	B	69
205/55R16	91	W	BSW	320 AA	632	214	7.8	C	B	69
205/55R16	94	W	BSW	320 AA	632	214	7.8	C	B	69
205/60R16	92	V	BSW	400 AA	652	209	7.8	C	B	69
205/65R16	95	H	BSW	400 AA	672	209	7.8	C	B	69
215/60R16	95	V	BSW	400 AA	664	221	7.8	C	B	69
205/45R16	87	W	BSW	320 AA	590	206	7.8	E	B	69
215/55R16	97	W	BSW	320 AA	642	226	7.8	C	B	69
215/65R16	98	H	BSW	400 AA	686	221	7.8	C	B	69
225/50R16	96	W	BSW	320 AA	632	233	7.8	C	B	69
225/55R16	99	W	BSW	320 AA	654	233	7.8	C	B	69
205/40R17	84	W	BSW	320 AA	596	212	7.8	E	B	69
205/45R17	88	W	BSW	320 AA	616	206	7.8	E	B	69
205/50R17	93	W	BSW	320 AA	638	214	7.8	C	B	69
215/40R17	87	W	BSW	320 AA	604	218	7.8	E	B	69
215/45R17	91	W	BSW	320 AA	626	213	7.8	C	B	69
215/50R17	95	W	BSW	320 AA	648	226	7.8	C	B	69
215/55R17	98	W	BSW	320 AA	668	226	7.8	C	B	69
225/45R17	94	W	BSW	320 AA	634	225	7.8	C	B	69
225/50R17	98	W	BSW	320 AA	658	233	7.8	C	B	69
225/55R17	101	W	BSW	320 AA	680	233	7.8	C	B	69
235/45R17	97	W	BSW	320 AA	644	236	7.8	C	B	69
235/50R17	100	W XL	BSW	320 AA	668	245	7.8	C	B	69
235/55R17	103	V XL	BSW	320 AA	690	245	7.8	C	B	69

Size	Load Index	Speed Rating	Sidewall	UTQG	O.D. (mm)	S.W. (mm)	T.D. (mm)	 RR	 WG	 NOISE
245/40R17	95	W XL	BSW	320 AA	628	248	7.8	C	B	69
245/45ZR17	99	W XL	BSW	320 AA	652	243	7.8	C	B	69
215/35R18	84	W XL	BSW	320 AA	607	218	7.8	C	B	69
215/40ZR18	89	W XL	BSW	320 AA	629	218	7.8	C	B	69
215/45R18	93	W XL	BSW	320 AA	651	213	7.8	C	B	69
225/40R18	92	W	BSW	320 AA	637	230	7.8	C	B	69
225/45R18	95	W	BSW	320 AA	659	225	7.8	C	B	69
235/40R18	95	W	BSW	320 AA	645	241	7.8	C	B	69
235/45ZR18	98	W XL	BSW	320 AA	669	236	7.8	C	B	69
245/40R18	97	W	BSW	320 AA	653	248	7.8	C	B	69
245/45R18	100	W	BSW	320 AA	677	243	7.8	C	B	69
245/50ZR18	104	W XL	BSW	320 AA	703	253	7.8	C	B	69
255/35ZR18	94	W	BSW	320 AA	635	260	7.8	C	B	69
255/45ZR18	103	W	BSW	320 AA	687	255	7.8	C	B	69
255/55ZR18	109	W	BSW	320 AA	737	265	7.8	C	B	69
225/35R19	88	W	BSW	320 AA	641	230	7.8	E	B	69
235/35R19	91	W	BSW	320 AA	647	241	7.8	C	B	69
245/35R19	93	W	BSW	320 AA	655	248	7.8	C	B	69
245/45ZR19	102	W	BSW	320 AA	703	243	7.8	C	B	69
255/30ZR19	91	W	BSW	320 AA	637	260	7.8	C	B	69
255/35ZR19	96	W	BSW	320 AA	661	260	7.8	C	B	69
255/40ZR19	100	W XL	BSW	320 AA	687	260	7.8	C	B	69
255/30ZR20	92	W	BSW	320 AA	662	260	7.5	C	B	71
275/35ZR20	102	W	BSW	320 AA	700	278	7.5	C	B	71
295/40ZR22	112	W	BSW	320 AA	795	301	7.5	C	B	71

CF19 RUN-FLAT





Ultra High Performance Run-Flat Tire




SIZE	Load Index	Speed Rating	Sidewall	UTQG	O.D. (mm)	S.W. (mm)	T.D. (mm)	 RR	 WG	 NOISE
225/45ZRF17	91	W	BSW	340 AA	634	225	7.8	C	B	69
225/50ZRF17	94	W	BSW	340 AA	658	233	7.8	C	B	69
225/55ZRF17	97	W	BSW	340 AA	680	233	7.8	C	B	69
225/40ZRF18	88	W	BSW	340 AA	637	230	7.8	C	B	69
225/45ZRF18	91	W	BSW	320 AA	659	225	7.8	C	B	69
225/45ZRF18	95	W XL	BSW	320 AA	659	225	7.8	C	B	69
245/40ZRF18	93	W	BSW	340 AA	653	248	7.8	C	B	69
245/45ZRF18	96	W	BSW	340 AA	677	243	7.8	C	B	69
245/50ZRF18	100	W	BSW	320 AA	703	253	7.8	C	B	69
245/50ZRF18	104	W XL	BSW	320 AA	703	253	7.8	C	B	69
255/55ZRF18	109	W XL	BSW	320 AA	737	265	7.8	C	B	73

CF28



SUV Tire




-  All season highway terrain SUV touring range designed for smooth, comfortable and surefooted performance.
-  5 Rib tread with multiple siping provide stable and quite ride and even tread wear for long even tread wear.
-  Optimized footprint with Full width Spiral nylon cap ply delivers high speed stability and durability under demanding driving conditions.
-  4 Wide circumferential grooves assist with water evacuation from footprint area to prevent hydroplaning.




Size	Load Index	Speed Rating	Sidewall	UTQG	O.D. (mm)	S.W. (mm)	Tread Depth (mm)	 RR	 WG	 NOISE
215/70R16	100	H	BSW	500AA	708	221	8.0	C	C	72
225/70R16	103	H	BSW	500AA	722	228	8.0	C	C	72
235/70R16	106	H	BSW	500AA	736	240	8.0	C	C	72
245/70R16	111	H	BSW	500AA	750	248	8.0	C	C	72
265/70R16	112	H	BSW	500AA	778	272	8.0	C	C	72
215/60R17	96	V	BSW	500AA	690	221	8.0	C	C	72
225/60R17	99	H	BSW	500AA	702	228	8.0	C	C	72
225/65R17	102	H	BSW	500AA	724	228	8.0	C	C	72
235/60R17	102	H	BSW	500AA	714	240	8.0	C	C	72
235/55R17	103	V	BSW	500AA	690	245	8.0	C	C	72
235/65R17	108	H	BSW	500AA	738	240	8.0	C	C	72
245/65R17	111	H	BSW	500AA	750	248	8.0	C	C	72
265/65R17	112	H	BSW	500AA	776	272	8.0	C	C	72
215/55R18	95	V	BSW	500AA	693	226	8.0	C	C	72
235/50R18	101	V	BSW	500AA	693	245	8.0	C	C	72
235/55R18	104	V	BSW	500AA	715	245	8.0	C	C	72
235/60R18	107	V	BSW	500AA	739	240	8.0	C	C	72
255/55R18	109	V	BSW	500AA	737	265	8.0	C	C	72
285/60R18	116	V	BSW	500AA	799	292	8.0	C	C	72
255/55R19	111	V	BSW	500AA	763	265	8.0	C	C	72



CF12

Commercial Tires for Van and Light Truck




-  All season commercial tire.
-  Optimized structure and tread compound strength and durability.
-  Zig-zag pattern for excellent traction performance.

Size	Load Index	Speed Rating	Sidewall	O.D. (mm)	S.W. (mm)	Tread Depth (mm)	 RR	 WG	 NOISE
165/70R13C	88/86	S	BSW	562	170	8.0	-	-	-
165R13C	91/89	R	BSW	596	167	8.0	-	-	-
175R14C	99/98	Q	BSW	634	178	8.5	E	B	71
175/70R14C	95/93	S	BSW	602	177	8.0	-	-	-
185R14C	102/100	R	BSW	650	188	10.5	E	B	71
195R14C	106/104	Q	BSW	666	198	8.5	E	B	71
205/75R14C	109/107	R	BSW	664	203	8.5	E	B	71
195R15C	106/104	R	BSW	691	198	8.5	E	B	71
195/70R15C	104/102	S	BSW	655	201	10.5	E	B	71
205/70R15C	106/104	R	BSW	669	209	10.5	E	B	71
205/75R15C	103/100	R	BSW	689	203	8.5	E	B	71
185/75R16C	104/102	R	BSW	684	184	8.5	E	B	71
215/75R16C	113/111	R	BSW	728	216	9.0	E	B	71
215/70R15C	109/107	R	BSW	683	221	8.5	E	B	71
225/70R15C	112/110	R	BSW	697	228	8.5	E	B	71
175/75R16C	101/99	R	BSW	668	177	8.0	E	B	71
195/75R16C	107/105	R	BSW	698	196	8.5	E	B	71
215/70R16C	108/106	R	BSW	709	221	8.5	E	B	71
185R14C	102/100	R	WSW	650	188	10.5	E	B	71
195R14C	106/104	Q	WSW	666	198	8.5	E	B	71
195R15C	106/104	R	WSW	691	198	8.5	E	B	71
205/75R14C	109/107	R	WSW	664	203	8.5	E	B	71
205/75R15C	103/100	R	WSW	689	203	8.5	E	B	71



CF20

Commercial Tire For Van and Light Truck




-  4 Rib design with wide optimized footprint provides for stable ride under heavy loads and even wear for long mileage.
-  Stabilized shoulder design with heat dissipating grooves prevent heat build-up under load operating conditions and improves durability under severe conditions.
-  Reliable and safe for demanding work conditions.

Size	Load Index	Speed Rating	Sidewall	O.D. (mm)	S.W. (mm)	Tread Depth (mm)	 RR	 WG	 NOISE
195/70R15C	104/102	R	BSW	655	201	8.5	E	B	72
225/70R15C	112/110	R	BSW	697	228	8.5	E	B	72
195/65R16C	104/102	R	BSW	660	201	8.5	E	B	72
205/65R16C	107/105	R	BSW	672	209	8.5	E	B	72
215/75R16C	113/111	R	BSW	728	216	8.5	E	B	72
235/65R16C	115/113	R	BSW	712	240	8.5	E	B	72
205/65R15C	102/100	T	BSW	647	209	8.5	E	B	72
215/65R15C	104/102	T	BSW	661	221	8.5	E	B	72
195/60R16C	99/97	R	BSW	640	201	8.5	E	B	72
215/60R16C	108/106	T	BSW	664	221	8.5	E	B	72
215/65R16C	109/107	T	BSW	686	221	8.5	E	B	72
225/65R16C	112/110	T	BSW	698	228	8.5	E	B	72
205/75R16C	110/108	R	BSW	714	203	8.5	E	B	72



CF5

Mud-Terrain Tire for Light Truck and SUV





-  This mud terrain tire provides excellent control in wild side driving.
-  Large stiff tread blocks offer superior traction under both dry and wet conditions.
-  Strong body design provides extra load capacity.

Size	PR	Load Index	Speed Rating	Sidewall	Standard Rim	O.D. (mm)	S.W. (mm)	Tread Depth (mm)	POR
31*10.50R15LT	6	109	Q	BSW	8½J	775	268	14.7	✓
32*11.5R15LT	6	113	Q	BSW	9J	801	290	14.3	✓
33*12.50R15LT	6	108	Q	BSW	10J	826	318	15.1	
33*12.50R17LT	8	114	Q	BSW	10J	826	318	15.1	
35*12.5R17LT	10	121	Q	BSW	10J	877	318	14.3	
33*12.50R18LT	10	118	Q	BSW	10J	826	318	15.1	
35*12.5R18LT	10	123	Q	BSW	10J	877	318	14.3	
33*12.5R20LT	10	114	Q	BSW	10J	826	318	14.3	
35*12.5R20LT	10	121	Q	BSW	10J	877	318	14.3	
37*13.5R20LT	10	127	Q	BSW	11J	928	345	14.9	
33*12.5R22LT	10	109	Q	BSW	10J	826	318	14.3	
35*12.5R22LT	10	117	Q	BSW	10J	877	318	14.3	
37*13.5R22LT	10	123	Q	BSW	11J	928	345	14.9	
LT215/75R15	8	106/103	Q	BSW	6J	703	216	14.3	✓
LT235/75R15	6	104/101	Q	BSW	6½J	733	235	14.3	
LT225/75R16	10	115/112	Q	BSW	6J	744	223	14.3	
LT235/70R16	8	110/107	Q	BSW	7J	736	240	14.3	✓
LT235/85R16	10	120/116	Q	BSW	6½J	806	235	14.3	
LT245/70R16	8	113/110	Q	BSW	7J	750	248	14.3	
LT245/75R16	10	120/116	Q	BSW	7J	774	248	14.3	
LT265/75R16	10	123/120	Q	BSW	7½J	804	267	14.7	
LT285/75R16	8	122/119	Q	BSW	8J	834	286	14.9	
LT285/75R16	10	126/123	Q	BSW	8J	834	286	14.9	✓
LT265/65R17	10	120/117	Q	BSW	8J	776	272	14.3	
LT265/70R17	8	118/115	Q	BSW	8J	804	272	14.7	
LT285/70R17	10	121/118	Q	BSW	8½J	832	292	14.9	
31*10.5R15LT	6	109	Q	RWL	8½J	775	268	14.7	
33*12.5R15LT	6	108	Q	RWL	10J	826	318	15.1	
LT215/75R15	8	106/103	Q	RWL	6J	703	216	14.3	
LT235/75R15	6	104/101	Q	RWL	6½J	733	235	14.3	
LT245/70R16	8	113/110	Q	RWL	7J	750	248	14.3	
LT245/75R16	10	120/116	Q	RWL	7J	774	248	14.3	✓
LT265/75R16	10	123/120	Q	RWL	7½J	804	267	14.7	



MAX AT

All-Terrain Tire for Light Truck and SUV




-  All terrain pattern design to enhance wet performance.
-  Tiered groove design makes a small moving angel of the tread block when cornering and kicks the rocks off.
-  Center rib to enhance directional performance.
-  Aggressive shoulder design to improve off-the-road performance.

Size	Load Index	Speed Rating	Side-wall	Standard Rim	O.D. (mm)	S.W. (mm)	Tread Depth (mm)	Max Load (kg)		Max Air (kPa)
								Single	Dual	
235/75R15	109	T XL	OWL	6½J	733	235	9.5	1030	-	340
235/70R16	106	T	OWL	7J	736	240	9.5	950	-	300
245/70R16	107	T	OWL	7J	750	248	9.5	975	-	300
265/70R16	112	T	OWL	8J	778	272	9.5	1120	-	300
235/65R17	108	T XL	OWL	7J	738	240	9.5	1000	-	350
245/65R17	107	T	OWL	7J	750	248	9.5	975	-	300
265/65R17	112	T	OWL	8J	776	272	9.5	1120	-	300
265/70R17	115	T	OWL	8J	804	272	9.5	1215	-	300
265/60R18	110	T	OWL	8J	775	272	9.5	1060	-	300
275/65R18	116	T	OWL	8J	815	279	9.5	1250	-	300
265/50R20	107	T	OWL	8½J	774	277	9.5	975	-	300
275/55R20	117	T XL	OWL	8½J	810	284	9.5	1285	-	340
275/60R20	115	T	OWL	8J	838	279	9.5	1215	-	300
31X10.50R15LT	109	S	OWL	8½J	775	268	11.5	1030	-	350
LT215/85R16	115/112	S	OWL	6J	772	216	11.5	1215	1120	550
LT225/75R16	115/112	S	OWL	6J	744	223	11.5	1215	1120	550
LT235/85R16	120/116	S	OWL	6½J	806	235	11.5	1380	1260	550
LT245/75R16	120/116	S	OWL	7J	774	248	11.5	1380	1260	550
LT265/75R16	123/120	S	OWL	7½J	804	267	11.5	1550	1400	550
LT285/75R16	122/119	S	OWL	8J	834	286	11.5	1500	1360	450
LT285/70R17	121/118	S	OWL	8J	804	272	11.5	1450	1320	550
LT265/70R17	121/118	S	OWL	8½J	832	292	11.5	1450	1320	450
LT275/65R20	126/123	S	OWL	8J	866	279	11.5	1701	1549	550



MAX TRANSP

Commercial Van


-  3-wide straight aqua channel to enhance wet performance.
-  Zigzag tyre main groove to enhance the tire traction.
-  Closed tyre rigid should block to improve tire high road endurance and high-speed driving stability.




Size	Load Index	Speed Rating	Side-wall	Standard Rim	O.D. (mm)	S.W. (mm)	Tread Depth (mm)	Max Load (Kg)		Max Air (kPa)
								Single	Dual	
195R14C	106/104	Q	RWW	5.5J	666	198	9.0	950	900	450
205/75R14C	109/107	Q	RWW	5.5J	664	203	9.0	1030	975	475
195R15C	106/104	Q	RWW	5.5J	691	198	9.0	950	900	450
205/75R15C	103/100	Q	RWW	5.5J	689	203	9.0	1030	975	475



FOUR SEASON **NEW**

All-Season Tire for Passenger Cars

-  Unique directional, streamlined and radial pattern design
-  Streamlined lateral grooves supplemented by sipe design
-  High rigidity shoulder design
-  Optimized tread pattern design
-  Innovative Four Seasons Tread compound

Size	LI/SI	Side-wall	Standard Rim	O.D. (mm)	S.W. (mm)	T.D. (mm)	Max Load (kg)	Max Load (kPa)	Max Pressure (Kpa/Psi)	 RR	 WG	 NOISE
155/70R13	75T	BSW	4.5	548	157	7.3	387	853	300/44	E	B	69
165/70R13	79T	BSW	5	562	170	7.3	437	963	300/44	E	B	69
175/70R13	82T	BSW	5	576	177	7.3	475	1047	300/44	E	B	69
165/70R14	81T	BSW	5	588	170	7.3	462	1019	300/44	E	B	69
175/70R14	84T	BSW	5	602	177	7.3	500	1102	300/44	E	B	69
175/70R14	88T XL	BSW	5	602	177	7.3	560	1235	340/50	E	B	69
165/65R14	79T	BSW	5	570	170	7.3	437	963	340/50	E	B	69
175/65R14	82T	BSW	5	584	177	7.3	475	1047	300/44	E	B	69
185/65R14	86H	BSW	5.5	596	189	7.3	530	1168	300/44	E	B	69
185/60R14	82H	BSW	5.5	578	189	7.3	475	1047	300/44	E	B	69
175/65R15	84H	BSW	5	609	177	7.3	500	1102	300/44	E	B	69
185/65R15	92T XL	BSW	5.5	621	189	7.3	630	1389	340/50	E	B	69
195/65R15	91H	BSW	6	635	201	7.5	615	1356	300/44	E	B	69
195/65R15	95V XL	BSW	6	635	201	7.5	690	1521	340/50	E	B	69
205/65R15	94V	BSW	6	647	209	7.5	670	1477	300/44	E	B	69
185/60R15	84H	BSW	5.5	603	189	7.3	500	1102	300/44	E	B	69
185/60R15	88H XL	BSW	5.5	603	189	7.3	560	1235	340/50	E	B	69
195/60R15	88H	BSW	6	615	201	7.5	560	1235	300/44	E	B	69
185/55R15	82H	BSW	6	585	194	7.3	475	1047	300/44	E	B	69
195/55R15	85H	BSW	6	595	201	7.3	515	1135	300/44	E	B	69
195/50R15	82V	BSW	6	577	201	7.5	475	1047	300/44	E	B	69
205/60R16	96V XL	BSW	6	652	209	7.5	710	1565	340/50	E	B	69
215/60R16	99H XL	BSW	6.5	664	221	7.5	775	1709	340/50	E	B	69
195/55R16	91V XL	BSW	6	620	201	7.5	615	1356	340/50	E	B	69
205/55R16	91H	BSW	6.5	632	214	7.5	615	1356	300/44	E	B	69
205/55R16	91V	BSW	6.5	632	214	7.5	615	1356	300/44	E	B	69
205/55R16	94V XL	BSW	6.5	632	214	7.5	670	1477	340/50	E	B	69
215/55R16	97V XL	BSW	7	642	226	7.5	730	1609	340/50	E	B	69
195/45R16	84V XL	BSW	6.5	582	195	7.5	500	1102	340/50	E	B	69
225/65R17	106H XL	BSW	6.5	724	228	7.8	950	2094	340/50	E	B	69
215/60R17	96H	BSW	6.5	690	221	7.5	710	1565	300/44	E	B	69
205/55ZR17	95W XL	BSW	6.5	658	214	7.5	690	1521	340/50	E	B	69
215/55ZR17	98W XL	BSW	7	668	226	7.5	750	1653	340/50	E	B	69
205/50ZR17	93W XL	BSW	6.5	638	214	7.5	650	1433	340/50	E	B	69






Size	LI/SI	Side-wall	Standard Rim	O.D. (mm)	S.W. (mm)	T.D. (mm)	Max Load (kg) (kPa)		Max Pressure (Kpa/Psi)	RR	WG	NOISE
215/50ZR17	95W XL	BSW	7	648	226	7.5	690	1521	340/50	E	B	69
225/50ZR17	98W XL	BSW	7	658	233	7.8	750	1653	340/50	E	B	69
225/45ZR17	94W XL	BSW	7.5	634	225	7.8	670	1477	340/50	E	B	69
235/45ZR17	97W XL	BSW	8	644	236	7.8	730	1609	340/50	E	B	69
235/60R18	107V XL	BSW	7	739	240	7.8	975	2149	340/50	E	B	69
225/55R18	98V	BSW	7	705	233	7.8	750	1653	300/44	E	B	69
235/50ZR18	101W XL	BSW	7.5	693	245	7.8	825	1819	340/50	E	B	69
245/45ZR18	100W XL	BSW	8	677	243	7.8	800	1764	340/50	E	B	69
225/40ZR18	92W XL	BSW	8	637	230	7.8	630	1389	340/50	E	B	69
235/55R19	105V XL	BSW	7.5	741	245	7.8	925	2039	340/50	E	B	69



FOUR SEASON VAN

All-Season Tire for Van

NEW






-  Three stepped longitudinal main O.D. groove design
-  Unique design of the block and the high-density sipe
-  Wide shoulder block design
-  Low noise pattern design
-  Innovative four-season tread compound




Size	LI/SI	Side-wall	Rim	O.D. (mm)	S.W. (mm)	T.D. (mm)	Max Load (Single / Dual) (kg) (kPa)		Max Pressure (Kpa/Psi)	RR	WG	NOISE
175/65R14C	90/88T	BSW	5	584	177	8	600/560	1323/1235	375/54	E	C	70
175/70R14C	95/93T	BSW	5	602	177	8	690/650	1521/1433	375/54	E	C	70
195/70R15C	104/102R	BSW	6	655	201	8	900/850	1984/1874	450/65	E	C	70
205/70R15C	106/104R	BSW	6	669	209	8	950/900	2094/1984	450/65	E	C	70
215/70R15C	109/107R	BSW	6.5	683	221	8.5	1030/975	2271/2149	450/65	E	C	70
225/70R15C	112/110R	BSW	6.5	697	228	8.5	1120/1060	2469/2337	450/65	E	C	70
185/75R16C	104/102R	BSW	5	684	184	8	900/850	1984/1874	475/69	E	C	70
195/75R16C	107/105R	BSW	5.5	698	196	8	975/925	2149/2039	475/69	E	C	70
205/75R16C	113/111R	BSW	5.5	714	203	8	1150/1090	2535/2403	525/76	E	C	70
215/75R16C	113/111R	BSW	6	728	216	8.5	1150/1090	2535/2403	475/69	E	C	70
225/75R16C	121/120R	BSW	6	744	223	8.5	1450/1400	3197/3086	575/83	E	C	70
195/65R16C	104/102T	BSW	6	660	201	8	900/850	1984/1874	475/69	E	C	70
205/65R16C	107/105T	BSW	6	672	209	8	975/925	2149/2039	475/69	E	C	70
215/65R16C	109/107T	BSW	6.5	686	221	8.5	1030/975	2271/2149	475/69	E	C	70
225/65R16C	112/110R	BSW	6.5	698	228	8.5	1120/1060	2469/2337	475/69	E	C	70
235/65R16C	115/113R	BSW	7	712	240	8.5	1215/1150	2679/2535	475/69	E	C	70
195/60R16C	99/97H	BSW	6	640	201	8	775/730	1709/1609	375/54	E	C	70
215/60R16C	103/101T	BSW	6.5	664	221	8.5	875/825	1929/1819	375/54	E	C	70
215/60R17C	109/107T	BSW	6.5	690	221	8.5	1030/975	2271/2149	475/69	E	C	70



CF17

Winter Tire

-  Studless winter tire with multi-angle siping providing excellent traction.
-  Asymmetrical pattern design offers even tread wear and stability while cornering.
-  Continuous outside tread blocks enhance excellent performance and precise steering.
-  The special rib segment design optimizes contact pressure distribution, improving handling.
-  The serrated groove walls absorb noise and deliver a quieter ride.




Size	Load Index	Speed Rating	Sidewall	Standard Rim	O.D. (mm)	S.W. (mm)	T.D. (mm)	 RR	 WG	 NOISE
175/65R14	82	T	BSW	5J	584	177	8.5	E	C	67
175/70R14	84	S	BSW	5J	602	177	8.5	E	C	67
185/60R14	82	T	BSW	5½J	578	189	8.5	E	C	67
185/65R14	86	T	BSW	5½J	596	189	8.5	E	C	67
195/60R14	86	H	BSW	6J	590	201	8.5	E	C	67
185/55R15	86	H XL	BSW	6J	585	194	8.5	E	C	67
185/60R15	84	H	BSW	5½J	603	189	8.8	E	C	67
185/65R15	88	T	BSW	5½J	621	189	8.5	E	C	67
195/55R15	85	V	BSW	6J	595	201	8.8	E	C	67
195/60R15	88	T	BSW	6J	615	201	8.8	E	C	67
195/65R15	91	T	BSW	6J	635	201	8.8	E	C	67
205/65R15	94	H	BSW	6J	647	209	8.8	E	C	67
195/50R16	88	H XL	BSW	6J	602	201	8.5	E	C	67
195/55R16	91	H XL	BSW	6J	620	201	8.8	E	C	67
205/55R16	91	T	BSW	6½J	632	214	8.8	E	C	67
205/60R16	92	T	BSW	6J	652	209	8.8	E	C	67
215/55R16	97	V XL	BSW	7J	642	226	8.8	E	C	67
215/60R16	95	H	BSW	6½J	664	221	8.8	E	C	67
225/55R16	99	H XL	BSW	7J	654	233	8.8	E	C	67
215/50R17	95	V XL	BSW	7J	648	226	8.8	E	C	67
215/55R17	98	V XL	BSW	7J	668	226	8.8	E	C	67
225/45R17	94	V XL	BSW	7½J	634	225	8.8	E	C	67
225/50R17	98	V XL	BSW	7J	658	233	8.8	E	C	67
225/55R17	101	V XL	BSW	7J	680	233	8.8	E	C	67
225/65R17	102	T	BSW	6½J	724	228	8.8	E	C	67
235/45R17	97	V XL	BSW	8J	644	236	8.8	E	C	67
235/55R17	103	V XL	BSW	7½J	690	245	8.8	E	C	67
245/45R17	99	V XL	BSW	8J	652	243	8.8	E	C	67
225/45R18	95	V XL	BSW	7½J	659	225	8.8	E	C	67
235/45R18	98	V XL	BSW	8J	669	236	8.8	E	C	67
245/45R18	100	V XL	BSW	8J	677	243	8.8	E	C	67
245/50R18	104	V XL	BSW	7½J	703	253	8.8	E	C	67
255/40R18	99	V XL	BSW	9J	661	260	8.3	E	C	70
255/45R18	103	V XL	BSW	8½J	687	255	8.8	E	C	70
275/45R18	107	V XL	BSW	9J	705	273	8.3	E	C	70
225/45R19	96	V XL	BSW	7½J	685	225	8.8	E	C	67
245/45R19	102	V XL	BSW	8J	703	243	8.8	E	C	70

CF27

Winter Tire



cornering under both dry and wet road condition.
 precise control when cornering at high speed.
 improves road contact area and provides precise control.

Size	Load Index	Speed Rating	Sidewall	Standard Rim	O.D. (mm)	S.W. (mm)	T.D. (mm)	 RR	 WG	 NOISE
215/75R15	100	S	BSW	6J	703	216	9.6	E	C	72
235/75R15	109	T XL	BSW	6½J	733	235	9.6	E	C	72
215/65R16	98	T	BSW	6½J	686	221	9.6	E	C	72
215/70R16	100	T	BSW	6½J	708	221	9.6	E	C	72
235/60R16	100	T	BSW	7J	688	240	9.6	E	C	72
235/70R16	106	T	BSW	7J	736	240	9.6	E	C	72
215/60R17	96	T	BSW	6½J	690	221	9.6	E	C	72
225/60R17	99	T	BSW	6½J	702	228	9.6	E	C	72
225/65R17	102	T	BSW	6½J	724	228	9.6	E	C	72
235/65R17	104	T	BSW	7J	738	240	9.6	E	C	72
265/65R17	112	T	BSW	8J	776	272	9.6	E	C	73
215/55R18	95	T	BSW	7J	693	226	9.6	E	C	72
225/55R18	98	T	BSW	7J	705	233	9.6	E	C	72
235/50R18	97	T	BSW	7½J	693	245	9.6	E	C	72
235/55R18	100	T	BSW	7½J	715	245	9.6	E	C	72
235/60R18	107	T XL	BSW	7J	739	240	9.6	E	C	72
245/60R18	105	T	BSW	7J	751	248	9.6	E	C	72
255/55R18	109	T XL	BSW	8J	737	265	9.6	E	C	73
225/55R19	99	T	BSW	7J	731	233	9.6	E	C	72
235/50R19	103	T XL	BSW	7½J	719	245	9.6	E	C	72
235/55R19	105	T XL	BSW	7½J	741	245	9.6	E	C	72
245/55R19	103	T	BSW	7½J	753	253	9.6	E	C	72
255/45R19	104	T XL	BSW	8½J	713	255	9.6	E	C	73
255/50R19	107	T XL	BSW	8J	739	265	9.6	E	C	73
245/45R20	103	T XL	BSW	8J	728	243	9.6	E	C	73
255/45R20	105	T XL	BSW	8½J	738	255	9.6	E	C	73
255/55R20	110	T XL	BSW	8J	788	265	9.6	E	C	73
275/45R20	110	T XL	BSW	9J	756	273	9.0	E	C	TBA
275/50R20	113	T XL	BSW	8½J	784	284	9.6	E	C	TBA



MAX STR

Semi-Steel Trailer Tire

- 🚛 All-season Trailer tire developed for all position trailer service.
- 🚛 5 Rib tread design offers excellent traction in both dry and wet condition.

SIZE	PR	Load Index	Speed Rating	Standard Rim	O.D. (mm)	S.W. (mm)	Tread Depth (mm)	Max Load (lbs)		Max Pressure (psi)
								Single	Dual	
ST175/80R13	6	91/87	L	5J	610	177	7.5	1360	1200	50
ST205/75R14	6	100/96	L	5½J	664	203	8.2	1760	1570	50
ST215/75R14	6	102/98	L	6J	678	216	8.2	1870	1650	50
ST205/75R15	6	101/97	L	5½J	689	203	8.2	1820	1610	50
ST205/75R15	8	107/102	L	5½J	689	203	8.2	2150	1870	65
ST225/75R15	8	113/108	L	6J	719	223	8.2	2540	2200	65
ST225/75R15	10	117/112	L	6J	719	223	8.2	2830	2470	80
ST235/80R16	10	124/120	L	6½J	782	235	8.2	3520	3080	80
ST235/85R16	12	128/124	L	6½J	806	235	8.0	3960	3520	95



ALL-STEEL STR


All-Steel Trailer Tire

- 🚛 High speed trailer tire for commercial and recreational towing applications.
- 🚛 Steel belts ensure stability, durability and long wear.
- 🚛 The tread compound design improves fuel economy and resist weather cracking.

Size	PR	Load Index	Speed Rating	Standard Rim	O.D. (inch)	S.W. (inch)	Tread Depth (32NDS)	Max Load (lbs)		Max Pressure (psi)
								Single	Dual	
ST235/80R16	14	129/125	M	6½J	30.7	9.3	11	4080	3640	110
ST235/85R16	14	132/127	M	6½J	31.7	9.3	12	4400	3860	110

TYRE SIZE KNOWLEDGE

225/40 ZR 18 92 W

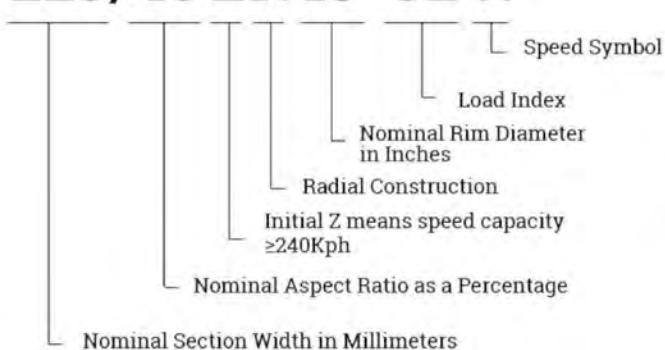

Aspect ratio(%) = $\frac{\text{Section Height}}{\text{Section Width}}$



Tire Pressure

Having the proper tire pressure is a crucial issue to maintain to ensure safety, driving performance, tire life and fuel cost.

How to check your tire pressure

Check your tires when they are cold or your vehicle has been parked for at least three hours.

You can find the correct air pressure for your tires by looking at the sticker that is commonly located on the door of the driver's side on many vehicles or looking in your owner's manual.

Keep in mind that you can't always tell if a tire is underinflated with a visual inspection and be sure to use a tire pressure gauge.

Tire Wear

The depth of tread on each of your tires is important for vehicle stability, especially on wet or icy roads. Irregular tire wear is a frustrating little gremlin that can steal your tires' performance and tread life if you let it. You can prevent unexpected accidents by checking for tire wear regularly.

How to check your tire tread wear levels

Check the depth of the tread by observing the Tread Wear Indicator (as the symbol of "Δ" or the letters of "TWI") on the bottom of major grooves in several places across. To ensure optimum safety and performance, tires should be replaced when groove depth remains less than 2mm.

When the tread surface is worn to the same level as these indicators, the tire is at the legal limit and should be replaced.

We recommend you to check for tire wear once in a month. Also, make sure to do a check once more after long distance travel.

Wheel Alignment

Wheel alignment is part of standard automobile maintenance that consists of adjusting the angles of the wheels so that they are set to the car maker's specification. The purpose of these adjustments is to reduce tire wear, and to ensure that vehicle travel is straight and true (without "pulling" to one side).

When to perform the alignment

Your car seems to be drifting to one side, even when you think you're driving straight.

Your steering wheel vibrates. You are driving straight, but your steering wheel isn't centered.

If none of these indicators occurs but it's been a while since your last alignment, check your owner's manual to see how often the manufacturer recommends having this service.