

Solar LED Batten Light



Product Specification




Product Parameter

Model	445-12W	625-18W	805-24W	1035-30W
LED Lamp	2835 LED 120PCS	2835 LED 180PCS	2835 LED 240PCS	2835 LED 300PCS
Solar Panel	9V 22W Mono-Crystalline	9V 27W Mono-Crystalline	9V 36W Mono-Crystalline	9V 55W Mono-Crystalline
Battery Type	LiFePO4 6.4V 12AH	LiFePO4 6.4V 18AH	LiFePO4 6.4V 24AH	LiFePO4 6.4V 30AH
Color Temperature	6000K			
Charging time	6-8 hours			
Discharging time	20-24 hours			
Sensing Method	PIR Detection			
LED Lumen	160lm/w			
LED Lifespan	25000H			
Material	Aluminum+PC			
Gross Weight/Garton	28KG	33.3KG	35KG	35.8KG
Product Size	445*120*120mm	625*120*120mm	805*120*120mm	1035*120*120mm
Warranty	2 years			


PRODUCT SIZE

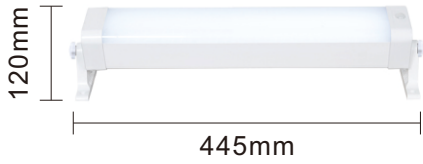



12W

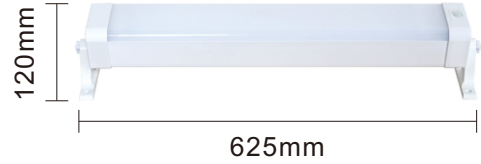

18W

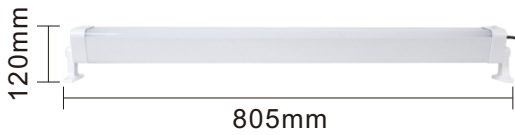

24W

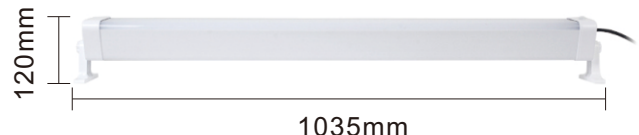


30W

APPLICATIONS




The courtyard, Removable toilet, The classroom
Swimming pool, Subway station, Factory workshop
Parking lot


ANALYSIS

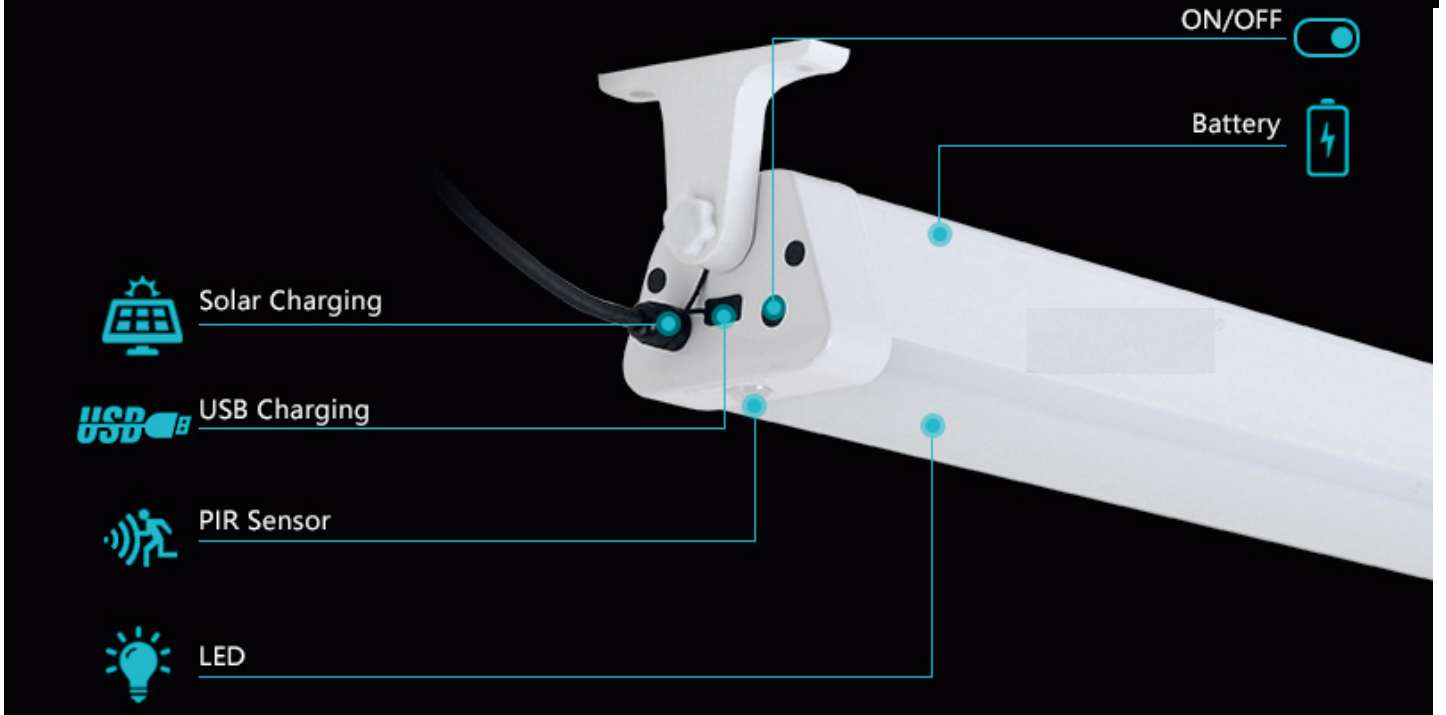

Operation Instruction Of Remote Control

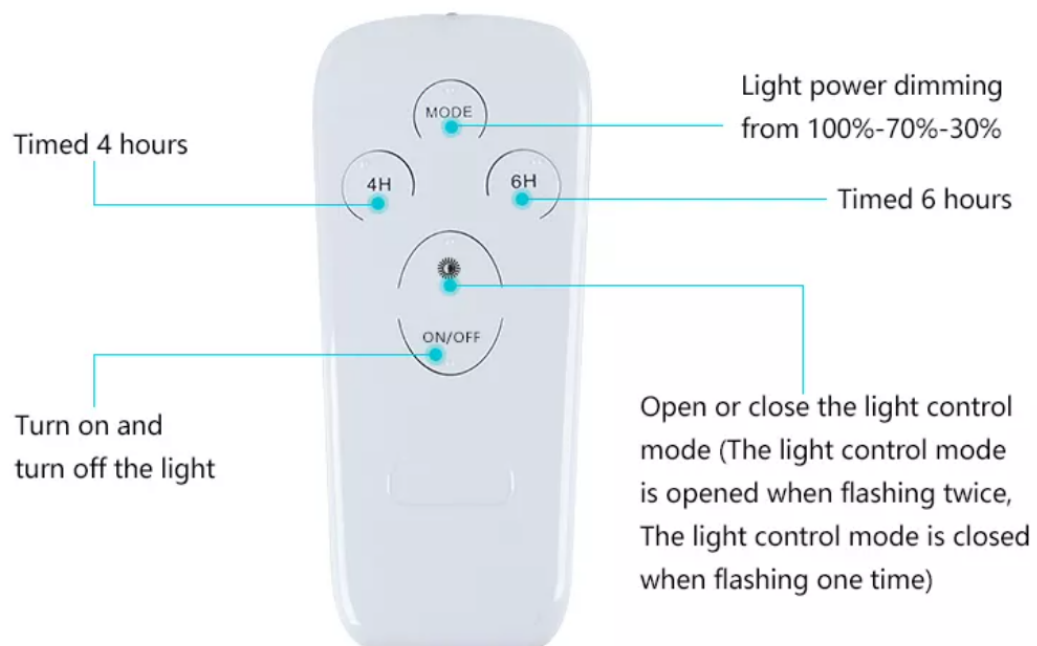

DETAILS

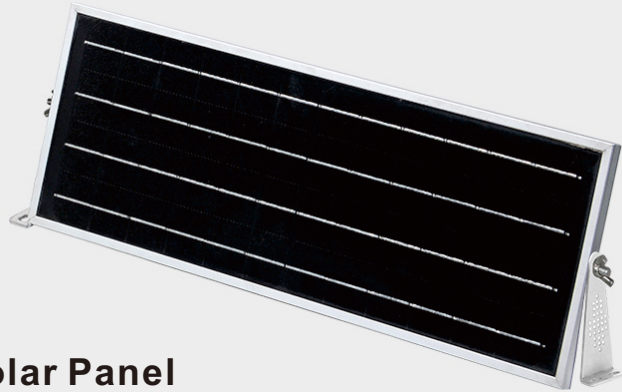

High Quality Solar Panel

High conversion rate and fast charging speed.



The Switch Starts With A Press


You need to turn on the switch to turn on the lights at night.



Aluminium Lamp Body

Stable and strong, waterproof and rustproof.

DETAILS

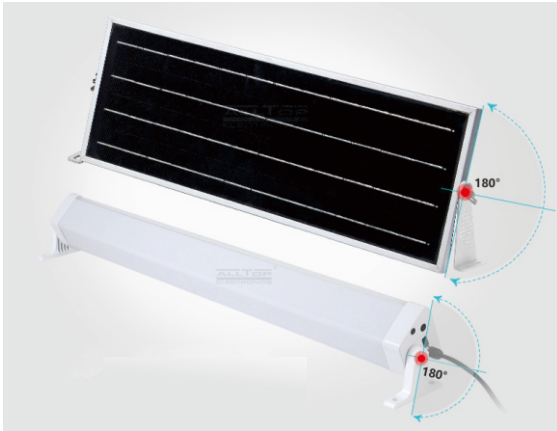

Adjustable Installation Angle

According to the actual installation needs to adjust the angle of the lamp. It can be adjusted at any angle for easier installation.

PRODUCT DETAILS

01 Solar Charge

5~6 rainy days when the battery is full
6~8 hours can be fully charged
Conversion rates are as high as 19%-21%





02 USB Charge





Provides 5V Charging



Installation Dimension

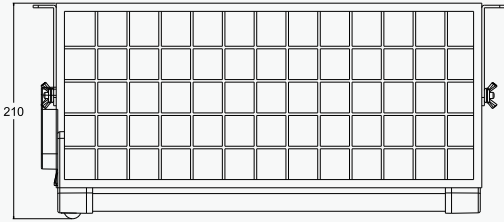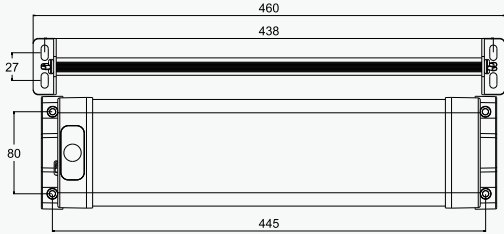



445-12W

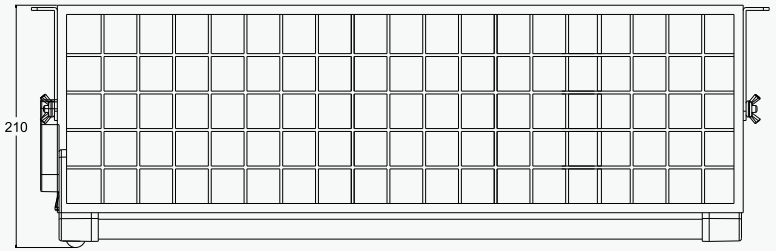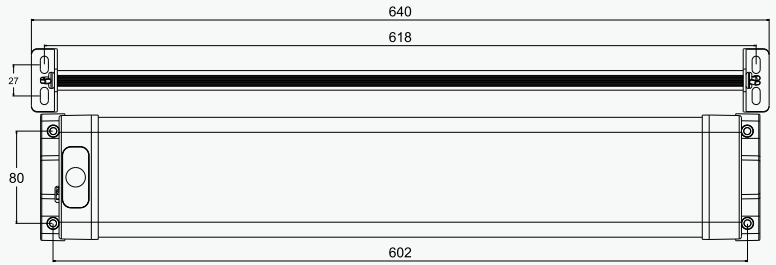

625-18W

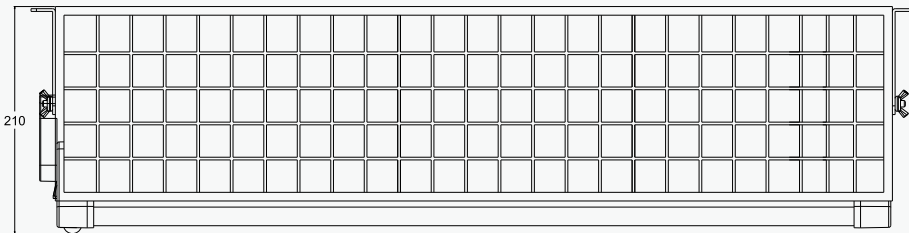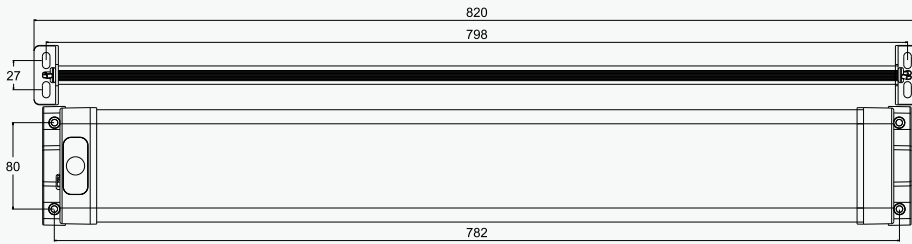

805-24W

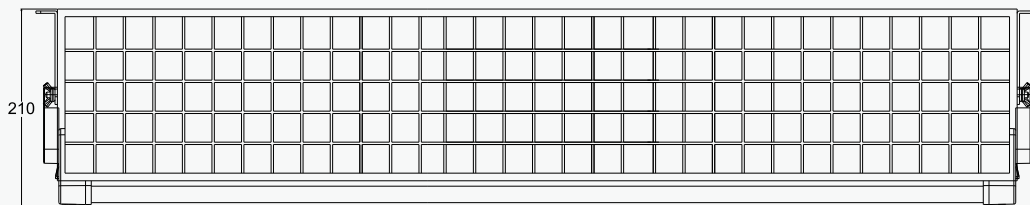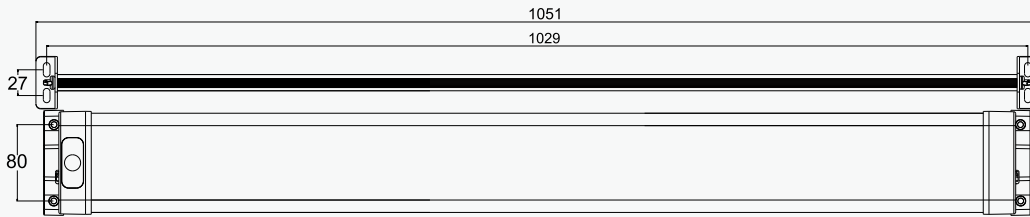

1035-30W