

NATURAL GAS GENSET

PPU2028NG

MTU 16V4000L64FNER¹³⁾

For Continuous Application

2028kWe 400V⁷⁾ 50Hz 1500 RPM NOx500⁸⁾

powered by



A Rolls-Royce
solution

General Description

- ❖ MTU gas genset powered by MTU gas engine 16V4000L64FNER
- ❖ Containerized design with ISO 40' High Cube Container
- ❖ Cooling system for engine and mixture cooling circuit (heat recovery as optional for CHP applications)
- ❖ Generator output field including customer's connection
- ❖ MCS (Module Control System) for containerized system control, regulating ,diagnosis and protection

Features of Container

- ❖ Full transportability of the system (Rail, Road, Sea)
- ❖ Lloyd's CSC-certified (Convention Safety Container) for trouble-free conventional transport (Rail, Road, Sea) and stackable storage of the modules
- ❖ Plug & Play solution for the ease of "On site" installation and operation
- ❖ Versatile use of the gensets (different operating conditions)
- ❖ Weather-proof
- ❖ Minimum external dimensions, ISO 40'HQ container¹⁰⁾
- ❖ Proven tested design (Extensive testing before launch as standard products)
- ❖ Combinable optional packages to suit various demands
- ❖ Environment friendly provision (e.g. low noise level, container floor sealed against leaking oil and water, optional catalytic converter and CHP unit)

Acoustic

Sound pressure level	95dB(A)
Tolerance	+2dB(A)
Distance from genset	1m
Reference height above ground	1.5m
Optional Sound pressure level	65 / 75dB(A)



Design Conditions

Ambient Temp.	0°C ~ 40°C ⁹⁾
Ambient Humidity	60%
Altitude	100m

Applicable Standard

Low voltage Directive 2006/95/EG
EMV Directive 2004/108/EG
Lloyds CSC Certified
Corners of container (ISO1161)
Protective coating (CSN EN12944)
Safety instruction according to international standard (ISO3864 / ANSI Z535)
Conformite Europeenne (2006/42/EC,2014/35/EU · 97/23/EC)

Color Scheme

Engine, generator	RAL7001
Frame	RAL5002
Control cabinet	RAL7035
External surface of container(if option is selected, customer shall advise the color code)	RAL9003

* Materials and specifications are subjected to change without prior notice.

Technical Specification

Engine

Engine Model	16V4000L64FNER
Number of cylinders /configuration	16V
Engine speed	1500 r/min
Bore	170 mm
Stroke	210 mm
Displacement	76.3 L
Mean Piston Speed	10.5 m/s
Compression Ratio	12.5
BMEP At Nominal Engine Speed	21.8 bar
Min-1	
Lube Oil Consumption	0.35 dm ³ /h

Internal Consumption

Internal consumption for the radiator	10.68 kWe
Internal consumption for HT< Pump	20.7 kWe
Internal consumption of ventilation fans	6.2 kWe
Battery charger	4 kWe
Coolant heater	9 kWe
Anti-condensation heater	1.2 kWe

Engine Coolant


Coolant Temp.(in/out)	78/92 °C
Coolant flow rate	74.7 m ³ /h
Max. operation pressure	6 bar
Pressure drop, design	2.88 /44.7 bar/ m ³ /h

Mixture Cooler 2nd Stage, External

Coolant Temp.(in/out),design	58 / 60.2 °C
Coolant volumetric flow, design, constant	34.3 m ³ /h
Pressure drop, design	0.48/50.6 bar/ m ³ /h
Max. operation pressure before mixture cooler	6 bar

Exhaust Gas Emissions⁵⁾

NOx, stated as NO2 (dry, 5 % O2)	< 500 mg/m ³ i.N.
CO (dry, 5 % O2)	< 1000 mg/m ³ i.N.
HCHO (dry, 5 % O2)	< 102 mg/m ³ i.N.

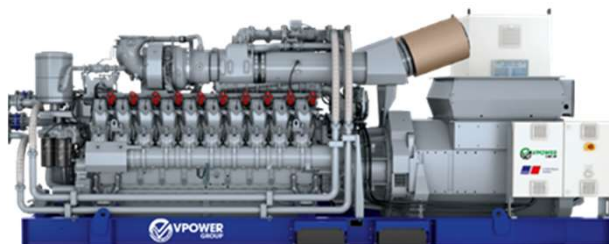

Reference Fuel

Natural gas	CH4 >95 Vol.%
Minimum methane number ¹¹⁾	80 MN
Range of heating value: design /operation range	10-10.5 / 8.0 - 11.0 kWh/m ³ i.N
Nominal size / gas pressure min. - max.	100 DN/ 155-250 mbar -mbar

Exhaust System

Exhaust gas temp. (after turbocharger)	424 °C
Exhaust gas volume flow, wet ¹⁾	8274 m ³ i.N./h
Exhaust gas volume flow, dry ¹⁾	7409 m ³ i.N./h
Exhaust gas mass flow, wet	10522 kg/h
Exhaust Back Pressure min. - max.	30-60 mbar

Liquid Capacity


Lube oil for engine	330 Liter
Coolant for engine	270 Liter
Intercooler coolant capacity	25 Liter

Alternator

Rating power (temp. rise class F)	2800 kVA
Insulation class / temp. rise class	H / F
Winding pitch	2/3
Protection	IP23
Max. allowable pf. inductive (overexcited) / capacitive (under excited)	0.8 / 1.0
Voltage tolerance / frequency tolerance	±5/± 5

* Materials and specifications are subjected to change without prior notice.

Technical Specification

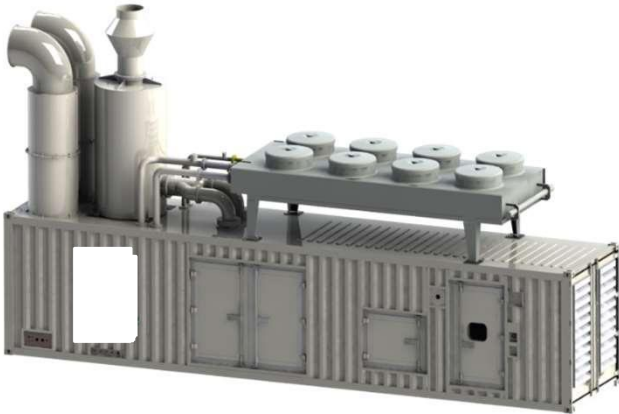

Cooling System

Rated radiator temperature	40 °C
Antifreeze cooling medium	35 %

Standard features :

- Radiator for engine cooling water circuit and gas mixture cooling circuit
- Radiator exhaust air via roof
- Stainless Steel piping
- Temperature control via mixing valve in gas mixture cooling and engine cooling water circuits
- Integrated control, safety and shut-off devices in the cooling water circuits
- Closed cooling system
- Intake and exhaust air with protective grid
- Intake and exhaust air with sound attenuated louvers
- Exhaust air at the front part of container
- Intake and exhaust air with weatherproof grid
- Conveyance of the required air volume by means of axial fans

Optional Items:

- Air intake with sand filter and protective grid
- Air intake with filter mats
- Engine cooling water heat recovery

Protective Equipment (Standard Features)

- Fire alarm system (horn + light)
- Gas alarm system (horn + light)
- Leakage monitor for "oil sump"
- Optical alarm for "bus bar under voltage"
- Safety instructions according to international standard (ISO3864 / ANSI Z535)
- Fire extinguishers(hand held type) at the access doors
- EMERGENCY-STOP button at the access doors (outside)
- Complete generator output field installed on the container wall
- Access from outside at one side of the container through lockable access doors.

Optional Items:

- Work platform

Generator Output Field (Standard Features)

- Isolating switch for power supply of auxiliary drives
- 3P Isolating switch for generator voltage
- 3P isolating switch for bus bar voltage
- Connection of customer power cable

Lighting

Standard features :

- Complete lighting consisting of 230 V 50 Hz
- Emergency lights
- Lighting for emergency exit in accordance with EU 89/654/EWG

Optional Item :

- Option DC 24V lighting

Gravity-operated lube oil system (Top Up System),Optional

- Extra lube oil tank
- Controlled via MCS
- Automatic refilling system
- High/Low level monitor
- Minimum volume monitor for lube oil tank
- Lubricating oil pump for draining the oil sump (including two solenoid valves)



* Materials and specifications are subjected to change without prior notice.

MIP & MCS GAS GENSET CONTROL SYSTEM

MIP (MTU Interface Panel)

Mounted directly on the base frame of all MTU systems, the MTU Interface Panel (MIP) manages engine and generator operation. It also controls paralleling and synchronizing with other sources of electricity, such as the utility or other generator sets, and provides remote access and software interfacing capabilities.

- Genset Control PLC
- Interface to Engine Control Unit ECU
- Interface to Alternator
- Bus interface to external (Modbus)
- On-base components cabled to MIP

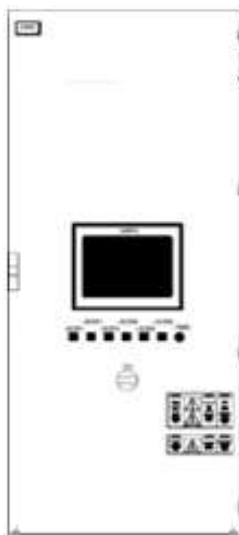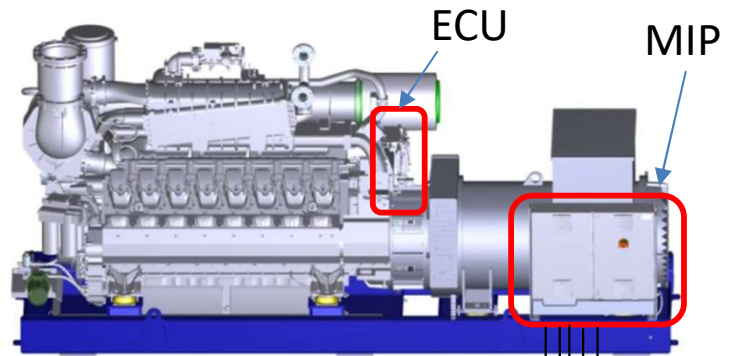

MCS (Module Control System)

Highly customizable solution—the Module Control System (MCS)—seamlessly links with the MIP engine and generator set controls by cable, making all vital data and functions accessible to the operator from one convenient location.

- Operator interface
- DC power supply
- Data Logging capability
- Remote connection to MTU available
- Control of off base components

The MIP/MCS consolidates the following controls and functions:

Generator Set Controls

- Starter Battery Charger
- Gas train control
- Engine oil system (refilling)
- I/O's (Inputs/Outputs), auxiliary drives
- Parallel/Island operation
- Load sharing
- PLC (Programmable Logic Controller)
- AVR (Automatic Voltage Regulator)
- Energy-Measure-Module – controls

Engine Control Unit (ECU)

- Gas supply (mixture/lambda)
- Throttle / speed control
- Ignition control
- Turbo bypass
- Knocking detection / control
- Engine sensors / monitoring
- Emission sensor (NOx)
- Start / stop procedure

Accessory Controls

- Alarm system
- Data logging
- Visualization (webserver)
- MCS interfaces (Ethernet)
- Customer interfaces (ex. Modbus)
- HMI touchscreen
- Remote monitoring and diagnostic

* Materials and specifications are subjected to change without prior notice.


Rated Power

Energy balance	%	100	75	50
Electrical Power ²⁾³⁾	kW	2028	1521	1014
Energy input ⁴⁾⁵⁾	kW	4672	3560	2473
Thermal output total ⁶⁾	kW	1122	823	563
Thermal output engine (block, lube oil) ⁶⁾	kW	1122	823	563
Thermal output mixture cooler 2nd stage ⁶⁾	kW	81	46	22
Exhaust heat (120 °C) ⁶⁾	kW	980	814	610
Engine power ISO 3046-1 ²⁾	kW	2080	1560	1045
Generator efficiency at power factor = 1	%	97.5	97.5	97.0
Electrical efficiency ⁴⁾	%	43.4	42.7	41.0
Total efficiency	%	88.4	88.7	88.4

Remarks:

- 1) Genset can operate at max. 1000m altitude and max. 40 °C intake air temperature; else power derating
- 2) Prime power operation will be designed specific to the project
- 3) Generator gross power at nominal voltage, power factor = 1 and nominal frequency
- 4) According to ISO 3046 (+5% tolerance), using reference fuel used at nominal voltage, power factor =1 and nominal frequency
- 5) Emission values during grid parallel operation
- 6) Thermal output at layout temperature; tolerance +/- 8%
- 7) Optional voltages : 690V/6300V/10500/11000V
- 8) Optional Nox value : 250 mg/m³ i.N.
- 9) Optional Ambient Temp: 25°C/ 40°C
- 10) Optional, Containerized solutions : ISO 20'HQ container or customized size
- 11) Optional Minimum methane number:60MN~80MN
- 12) Optional CHP applications for supplying hot water or steam
- 13) Optional Engine model: 16V4000L64

Dimensions and Weight (Typical Design)

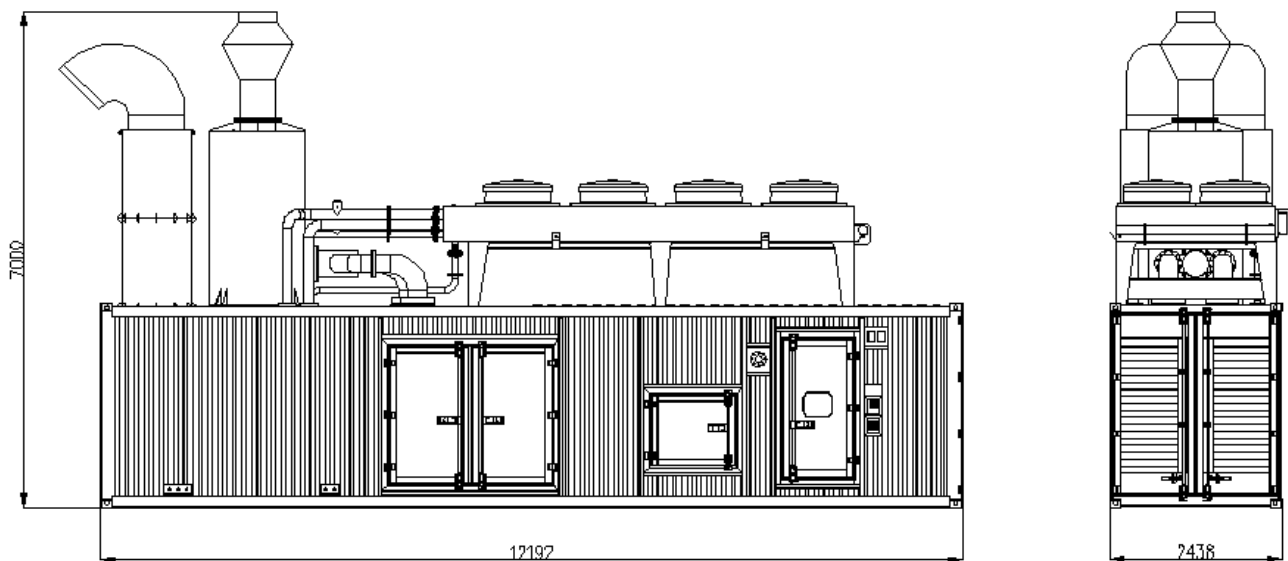

Genset Model	Dry Weight (kg)	Dimensions (L×W×H) mm
PPU2028NG	31700	12192 x 2438 x 7000

* Materials and specifications are subjected to change without prior notice.

Please contact your local VPower dealer for further information. Please note that products illustrated may differ from production models. Not all models and accessories are available in all markets, and standard equipment may vary between different markets. Every effort has been made to ensure that facts and figures are correct at the time of publication. However, VPower reserves the right to make changes without prior notice at any time.
