










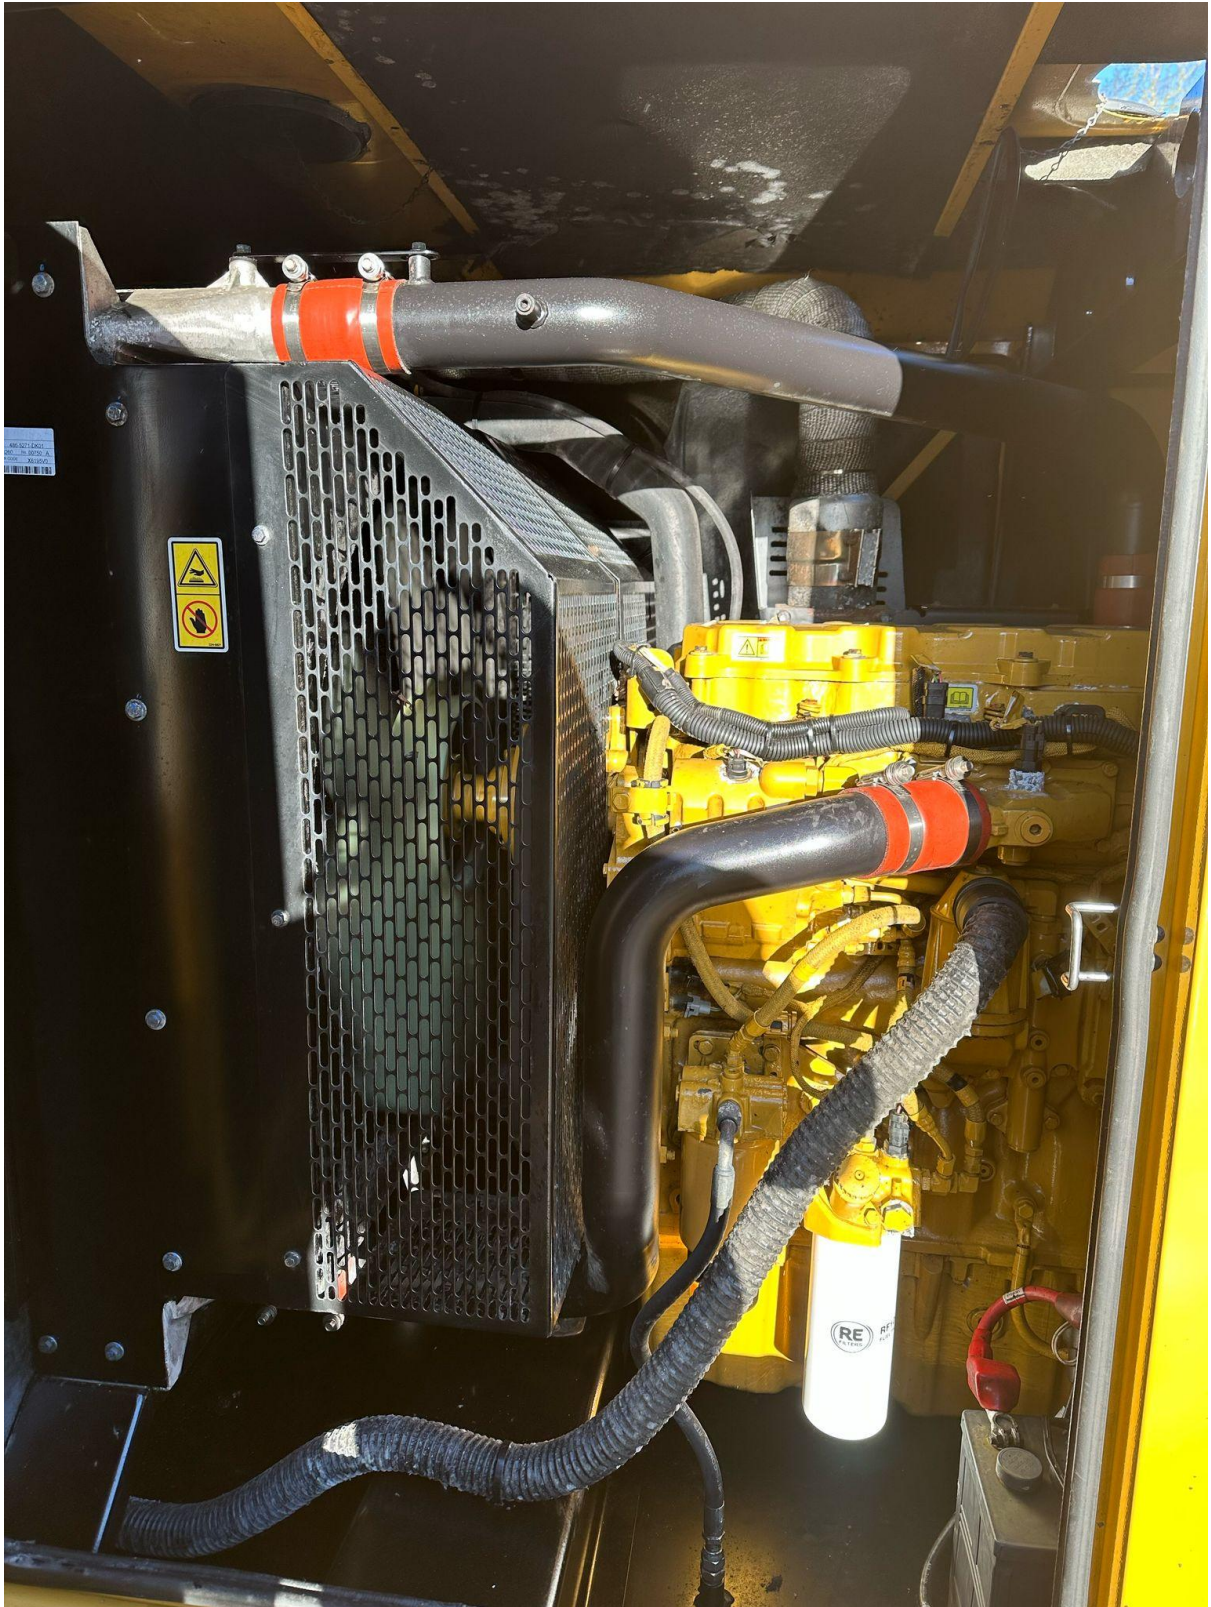





0 kPa

0 rpm

PPED

23°C 24.6 V

620.1 hrs

ILLAR®

ING SET

SERIAL NUMBER	DE275E0	
MONTH/YEAR OF MANUFACTURE	CAT000C9HLN901346	
RATED POWER - STANDBY	02/2019	
	275	kVA
	220	kW
	0.80	COS Ø
RATED VOLTAGE	400/230	V
PHASE	3	
RATED FREQUENCY	50	Hz
RATED CURRENT	397	A
RATED R.P.M	1500	m
MAXIMUM ALTITUDE*	100.0	°C
MAXIMUM AMBIENT	25	
TEMPERATURE*	0000002782	Kg
MASS		
GENERATOR	K5C00564	
GENERATOR CONNECTION	S STAR	
RATING ISO 8528- 3	PR 500H TLD.875	
GENERATOR ENCLOSURE	IP 23	
INSULATION CLASS	H	V
EXCITATION VOLTAGE	55.4	A
EXCITATION CURRENT	3.77	
ENGINE	S9X02922	

MADE IN UK

*GENERATOR SET IS DESIGNED TO OPERATE IN AMBIENT TEMPERATURES UP TO 50°C AND AT HIGHER ALTITUDES. PLEASE CONSULT FACTORY FOR OUTPUTS AVAILABLE