

Stock List of Subsea Equipment & XMTs

Current Inventory of Subsea Production Tree Stock and Ancillary Equipment – May 2025

2x FMC Technip XT Assemblies

Product ESP EHXT assembly
FFS transportation assembly
Overtrawable canopy c/w sling set
Funnel extension c/w sling set
18 ¾ VX gasket
Full control module
Tubing Hanger subsystem
Full Test and ROV systems



ROV SCM

3x GHH Rand C14D rotary oil free screw compressors



3x ABB MNS drive data at 300kW

2x Air dryer humidifiers




Compressed air tools, increase CA capacity, remove N2 from air. Much more info available

Termomeccanica Oil Pipeline Pump – new & unused, full documentation upon request



Speedlock FMC testport

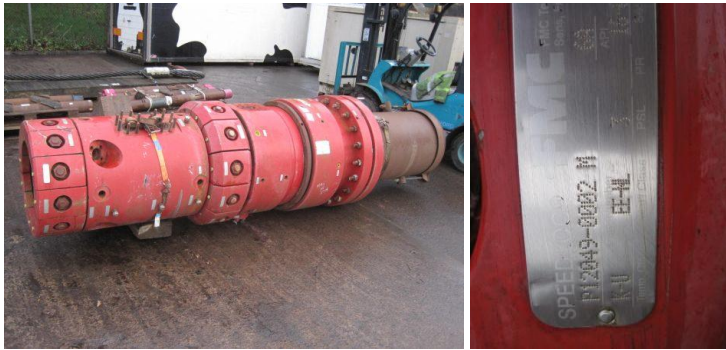

1/2 API LP Test Port
P1000014677 F
F14021378
1.00"-8UNC-2B Lift Hole
P12049-0002M
26-190-88ZN

New inventory lists covering hundreds of smaller items – **please contact for all 10 pages.**





1x OneSubsea Booster Pump

Multiphase, multiflow, helicoaxial subsea booster pump

2 pole induction motor

1000kw at 4042 rpm

5200v 3 phase

68Hz

2046 Nm rated torque

Insulation 11kv

Impeller type: 8 Stages

Differential pressure at design point: 3.9 MPa

GVF at inlet at design point: 60%

Viscosity at design point 1 MPa·s

Shaft power at design point 900 kW

Flow @ Design Point m³/h



2x Production Spool Tree Assemblies ex Aker

5" x 2", Drill Through Horizontal Tree, Gas Lift, Dual Choke c/w Downhole Smartwell Control.

Part Number: 2206130-15, Serial Numbers: 110778616-01 & 110982674-01

FLS Gate Valves c/w CM Actuators

Water Depth Rating: 1000m

WP 5000psi, API 16A, API 17D, PSL3

Material Class: HH-NL Production Bore, DD-NL Annulus Bore

Rated H2S Service

Temperature Class: P-U

Control Fluid: HW540

AKER SCMMB Installed



2x Water Inj Spool Tree Assemblies ex Aker

5" x 2", Drill Through Horizontal Tree.

Part Number: 2206130-12, Serial Number: 110399649-01

FLS Gate Valves c/w CM Actuators

Water Depth Rating: 1000m

WP 5000psi, API 16A, API 17D, PSL3

Material Class: HH-NL Production Bore, DD-NL Annulus Bore

Rated H2S Service

Temperature Class: P-U

Control Fluid: HW540

AKER SCMMB Installed



Equipment for use with the above

2 x Production Flowbase Assemblies, 5-1/8" Production Loop, 2-1/16" Gas Lift Loop

Part Number: 2206129-06, Serial Number: 500019293 & 110967512-01

Water Depth Rating: 1000m

WP 5000psi, API 16A, API 17D, PSL3

Material Class: HH Production Bore, EE Gas Lift Bore

Rated H2S Service

Temperature Class: P-U



4 x G2 Tubing Hanger Assemblies, RLH & MEC Seals, 4 Downhole Hydraulic Ports (3 x Plugged), 2 x Electrical Ports (Both Plugged) c/w 6ft 5-1/2" 20lb/ft Vam Top HT Pin x Pin pups, 25% Chrome.

5.25" SSR Wireline Plug Prep.

Part Number: 2206342-07, Serial Number: 110555541-01 & 110345981-01

Water Depth Rating: 1000m

WP 5000psi, API 16A, API 17D, PSL3

Material Class: HH-NL

Rated H2S Service

Temperature Class: P-U

3 x G2 Internal Tree Cap Assemblies, RLH & MEC Seals,

5.75" SSR Wireline Plug Prep

Part Number: 2180719-03, Serial Number: 110504700-01 & 11071016-01

Water Depth Rating: 1000m

WP 5000psi, API 16A, API 17D, PSL3

Material Class: EE-NL



Rated H2S Service
Temperature Class: P-U

1 x Wireline Plug for G2 Hanger 5.25" Dia.
Part Number: 2730550, Serial Number: 45210822-001-02-02
Material Class: HH
WP 5000psi, API 6A, PSL3

1 x G2 Version B Isolation Sleeve for STM-15 10-3/4" Casing Hanger
Upper Seal Profile 13.625" Dia
Part Number: 2055523-20, Serial Number: 68950-1

4 x G2 Tree Debris Cap Assembly 18-3/4" STM-15 Cameron Hub
Part Number: 2206131-01, Serial Numbers: 110491354-01 and 3 x TBC

2 x STM-15 Drill Thru Adapter Assemblies "Short"
STM-15 Wellhead System,
API 6A, TEMP CLASS: L, P, R, S, T, U & V,
Material Class: AA, BB, DD & EE, PSL 3.

6 x Deflector Base Assemblies, Three Sections c/w 2 x Walkways, Centre Ring, Guide Post and Mounting Spike.
Part Number: 2206838-01, Serial Numbers: 111039588-01, 4500937154-01, 4500806157-01, 11103958901, 4500716043-02-01, 4500716043-01

1 x Retrievable Guide Base Assembly c/w 4 x Posts
STM-15 Wellhead System
Regan Latch Profile
API 17D, ISO 13628-4
Part Number: 2044521-10, Serial Numbers: 5549711

2 x STM-15 18-3/4" 15k WP Hub High Pressure Housing with Load Shoulder c/w 20" 0.812" WT 15ft Extension c/w RL-4S Pin Connector
Part Number: 2063938-03 Serial Numbers: 110484311-01, 110629526-01
PSL3

2x Vetco Grey production Trees

MM – 50020429 Production Tree

5.000 x 2.000, 5K PSI MWP

Part No. A110575-193

Serial No. M967250-1TOM6/TOM3

Dimensions (LxWxH) – 150" x 144" x 93"

Weight – 18.2T C/w guidebase (dimensions LxWxH – 5.71m x 5.71m x 4.1m)



Frame Assemblies to match above x2



1x Drillquip water Inj Xmas Tree

MM – 50020423

Water Injection Xmas Tree 5.12" x 2.06", 5K

Part No. 4-801205-02

Serial No. AW58815-01

Dimensions (LxWxH) – 166" x 158" x 140"

Weight – 32T



1x One Subsea Horizontal Production Spool Tree



HXT Assembly

Part No. 2340550-07

Serial No. 112993592

OneSubsea Subsea Horizontal (spool) Xmas Tree (HXT) Assembly,

Production service with annulus gas lift,

API 6A & 17D, PSL 3G,

HH & EE, OF to 250F,

5in Prod x 2in Annulus, 10Ksi Max Working Pressure,

18-3/4in H4 re-entry profile up, 18-3/4in DWH Wellhead connector btm.

Hydraulic control system with Proserv module mounting base and Brayco SV/3 fluid.

Cameron-Willis CC40SR and CC20SR chokes.

Manufactured 2014, unused.

1x One Subsea Vertical Water Inj Xmas Tree



VXT Assembly

Part No. 2096676-13

OneSubsea, Subsea Vertical (dual bore) Xmas Tree

Water Injection service, API 6A & 17D, PSL 3

HH & EE, OF to 250F

5in Injection x 2in Annulus

10Ksi Max Working Pressure

13-5/8in hub re-entry profile up,

18-3/4in H4 Wellhead connector btm.

Hydraulic control system with AKS module mounting base and Brayco SV/3 fluid.

Cameron-Willis CC40SR choke.

Manufactured 2015, Unused.

1x Cameron Drill Quip Surface XT



Year 2008

Part Number 228-9151-01

Serial Number 111058854-1

2x Baker Hughes Horizontal Production Tree



Year 2020 Unused horizontal production tree

Production 5 x 2, 5M, Serial number M247920-1, weight 35.9 Tonnes

Serial number M281490-1, weight 37.1 Tonne

Frames and legs for the above



1x Vetco Grey Production Tree



1x FMC Subsea Tree



Year – 2008

Part No. P206796-C, Serial No. 2002-09-020D

1x SCS Composite Subsea Tree



1 x SCS Composite Subsea Tree 5-1/8" 6500psi WP c/w 13-5/8" 7500psi WP Hydraulic Quik-Clamp Connector Down c/w integral KSI RMS concentric wet mateable electric connector assembly

Composite Tree includes the following support elements:

1 x SCS Tree Cap 5-1/4" 6500psi WP Tree Mandrel up x 5-1/4" 6500psi WP Hydraulic Connector Down c/w 3 x Hydraulic Stab Couplers Up & 18 x Hydraulic jumper couplers down.

1 x SCS protection structure base, single wellhead conductor mounted c/w guideposts.

1 x SCS Protective Structure upper half, 1 x SCS protection structure debris cap

Bow-Out Preventors x7



13 5/8" Double Ram BOP, 13 5/8" Single Ram BOP

13 5/8" -5K Harding Annular BOP, 13 5/8" -5M Double Ram BOP

13 5/8" -5M Single Ram BOP

Test Certificates available on request

Cameron Control Unit



Part Number 2197999-42REV02
Serial Number 4501374500/2/1/1
Gross Weight 6600KG

FMC Technologies Wellhead Test Pump



Topside Umbilical Termination Assembly



Year 2008

Part No 223423-06

Serial No 111063970/01

Part No 223999-20

Serial No 4501382546/1/1/1

Umbilical Control Equipment



Build: 1995 – 2005, Various items:

Flushing Rig BABZ1161 P/N2175231-22

Thrt Reel with Umbilical 4040 x 3600 x 3400 BABZ1338 P/N2175375-43

Umbilical Sheave 2750 x 280 x 1300 BABZ1326 P/N2175265-11

Jumper Basket IWOCs Gross 5000kg BABZ1028 P/N223210-03

Jumper Basket IWOCs Gross 4400kg BABZ1339 P/N223210-03

Workover HPU with Control Panel BABZ1400 P/N223012-11

Umbilical Sheave 2750 x 280 x 1300 SWL 2500kg BABZ1394 P/N2175265-11

Umbilical Sheave 2750 x 280 x 1300 3080kg BABZ1328 P/N2175265-11

Main Reel with Umbilical BABZ1327 P/N223030-32

Jumper Basket IWOCs 5000kg BABZ1399 P/N223210-03

Basket for Jumper 3600kg BABZ1329 P/N223210-06

BEL Subsea Gate Valves



2 x Subsea Through Conduit Slab Gate Valves:

Size – 7.1/16"

Rating – 345 bar (NACE)

1 x Subsea Through Conduit Triple (4 port) Slab Gate Valve:

Size – 1.13/16"

Rating – 345 bar (NACE)

1 x Subsea Through Conduit Double (3 port) Slab Gate Valve:

Size – 1.13/16"

Rating – 345 bar (NACE)

Serial No. 51573

All Manufactured in April 2013